

LED floodlight without sensor

XLED home 2

V2 white

EAN 4007841 033125

Article number 033125



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



IP44



Panel 180° hor., 180° ver.



networkable via cable



energy saving

5 years

manufacturer's warranty
steinel.de/garantie5y



CE



Light source not exchangeable



Control gear not exchangeable

Function description

Dazzlingly stylish LED floodlight. XLED home 2 – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide-area lighting (1550 lm at 13,7 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC).

Technical specifications

Dimensions (L x W x H)	161 x 180 x 181 mm	Mains power supply	220 – 240 V / 50 – 60 Hz
With lamp	Yes, STEINEL LED system	Output	5 – 25 W
With motion detector	No	Power consumption	0,5 W
Manufacturer's Warranty	5 years	Photo-cell controller	No
Version	white	Luminous flux total product	1550 lm
PU1, EAN	4007841033125	Measured luminous flux (360°)	1550 lm
Application, place	Outdoors	Total product efficiency	113 lm/W
Application, room	outdoors, all round the building, terrace / balcony, courtyard & driveway	Colour temperature	3000 K
Installation site	wall, corner	Colour variation LED	SDCM3
Installation	Surface wiring, corner, Wall	Colour Rendering Index	80-89
Impact resistance	IK03	Lamp	LED cannot be replaced
IP-rating	IP44	LED life expectancy (max. °C)	50000 h
Protection class	II	Service life LED L70B50 (25°)	> 60000 h
Ambient temperature	-20 – 40 °C	Drop in luminous flux in accordance with LM80	L70B10
Housing material	HCMC	LED cooling system	HCMC (High Conductive Magnesium Composite)
Cover material	Plastic, opal		

LED floodlight without sensor

XLED home 2

V2 white

EAN 4007841 033125


Article number 033125




Accessories

EAN 4007841 055875	Corner wall mount XLED home 2/ PRO 240
EAN 4007841 053086	Corner wall mount XLED Home 2/ Pro 240
EAN 4007841 055615	Corner wall mount XLED home 2/ PRO 240

Dimension Drawing

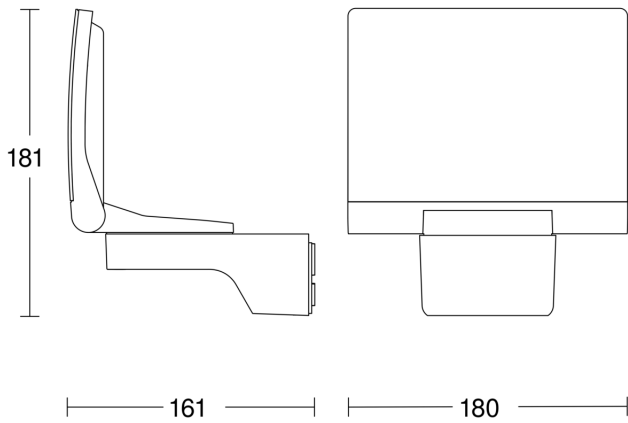

Light Distribution Curve



Output	13,7 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Measured luminous flux (360°)	1550 lm
Colour temperature	3000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)

Master/slave interconnection circuit diagram

