


LED floodlight without sensor

XLED ONE XL

white

EAN 4007841 065232

Article number 065232

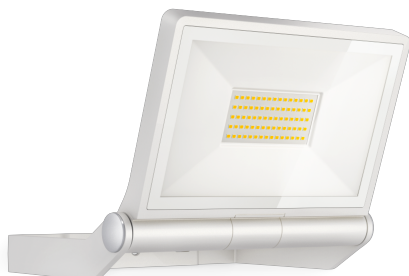

LED

long life LED
50.000 h

3000 K

3000K
warm-white



IP44



Panel 180° vertical



indoor/outdoor
light



energy saving

CE

CE

3 years

manufacturer's
warranty
[steinel.de/garantie3y](https://www.steinel.de/garantie3y)



Light source not
exchangeable



Control gear not
exchangeable

Function description

Powerful lighting very big on style. The XLED ONE XL with an output of 42,6 W delivers a powerful 3000 K and 4200 lm of warm white light. Tilting through 180°, the wall and ceiling spot is fitted with high-quality and particularly long-lasting LEDs with a service life of a good 30 years – without any ifs or buts. Protection class: IP44.

Technical specifications

Dimensions (L x W x H)	193 x 259 x 215 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	3 years
Version	white
PU1, EAN	4007841065232
Application, place	Outdoors
Application, room	outdoors, courtyard & driveway
Installation site	wall, ceiling
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium

Mains power supply	220 – 240 V / 50 – 60 Hz
Output	25 – 50 W
Photo-cell controller	No
Luminous flux total product	4200 lm
Measured luminous flux (360°)	4200 lm
Total product efficiency	99 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 36000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
Basic light level function	No

LED floodlight without sensor

XLED ONE XL

white

EAN 4007841 065232

Article number 065232



Dimension Drawing

