

Sensor-switched LED floodlight

LS 300 LED

black

EAN 4007841 067571

Article number 067571



LED

30 years (Ø 4,5h / day)

4000 K

4000K neutral white



infrared sensor 240°



max. 12 m



IP44



2 - 1000 lux



10 sec - 15 min



energy saving

3 years

manufacturer's warranty
[steinell.de/garantie3y](https://www.steinell.de/garantie3y)



CE

Function description

Extremely bright, robust and vigilant: the LS 300 LED sensor-switched floodlight. On-demand light for illuminating large areas around buildings. Infrared sensor with 240° angle of coverage and 12 m reach. Light output 2962 lm, colour temperature 4000 K, power consumption 29,5 W. Robust aluminium floodlight head. Available in black or white.

LS 300 LED

black

EAN 4007841 067571


Article number 067571

Technical specifications

Dimensions (L x W x H)	186 x 213 x 241 mm
With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Version	black
PU1, EAN	4007841067571
Application, place	Outdoors
Application, room	outdoors, all round the building, courtyard & driveway
Colour	black
Includes corner wall mount	No
Installation site	wall
Installation	Wall, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-10 – 30 °C
Housing material	Aluminium
Cover material	Glass transparent
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	25 - 50 W
Power consumption	30,4 W
Mounting height max.	4,00 m

Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3.5 m (26 m ²)
Reach, tangential	r = 12 m (302 m ²)
Photo-cell controller	Yes
Luminous flux total product	2704 lm
Measured luminous flux (360°)	2962 lm
Total product efficiency	92 lm/W
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
Soft light start	No
Twilight setting	2 – 1000 lx
Time setting	10 s – 15 Min.
Basic light level function	No
Interconnection	No

Detection Zone

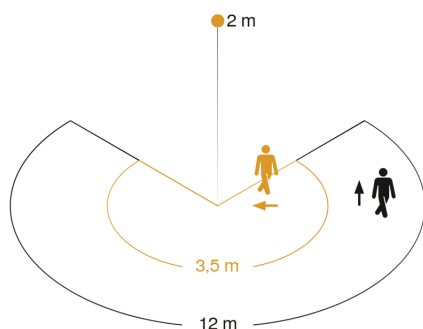

Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

