Ourdoor light without sensor

L 910

without motion detector
EAN 4007841 078720
Article number 078720

LED
long life LED 50.000 h

3000 K
3000K warm-white

IP44

networkable

energy saving

3 years
manufacture's warranty steinel.de/garantie3y

CE

Light source not exchangeable

Control gear not exchangeable

Function description

Elegant and intelligent. The LED Up-/Downlight L 910, ideal for house entrances and fronts. 9,8 W STEINEL LED light system with 797 lm, 30-year service life (Ø 4.5 h / day, simultaneous light switching with networked lights.

Technical specifications

Dimensions (L x W x H)	85 x 80 x 235 mm
With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	3 years
With remote control	Nein
Version	without motion detector
PU1, EAN	4007841078720
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, terrace / balcony
Colour	Anthracite
includes sheet of self-adhesive numbers	No
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal

Mains power supply	220 – 240 V / 50 – 60 Hz
Output	5 - 25 W
Average rated life expectancy of power supply unit at 25°C	> 60000 h
Luminous flux total product	797 lm
Measured luminos flux (360°)	797 lm
Total product efficiency	81 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 60000 h
Drop in luminous flux in accordance with LM80	L70B50
Base	without
LED cooling system	Passive Thermo Control
Soft light start	No
Interconnection	No

Ourdoor light without sensor

L 910

without motion detector
EAN 4007841 078720
Article number 078720
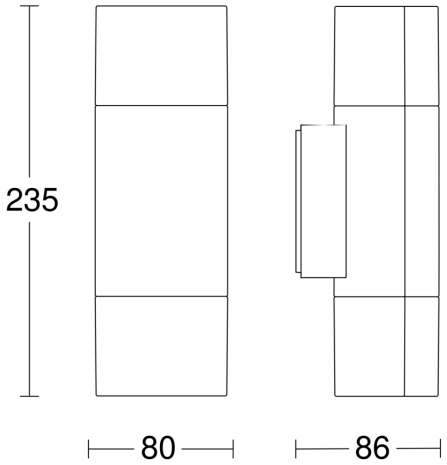
Dimension Drawing