


10020/2 Data Sheet

Type 1,2&3 SPD



- Compliant to BS EN 61643-11
- Suitable for TNC-S and TN-S installations
- Window Indication
- Remote changeover contacts as standard
- Din rail mountable
- Recommended backup fuse / MCB 63A
- Recommended cable size minimum 16mm

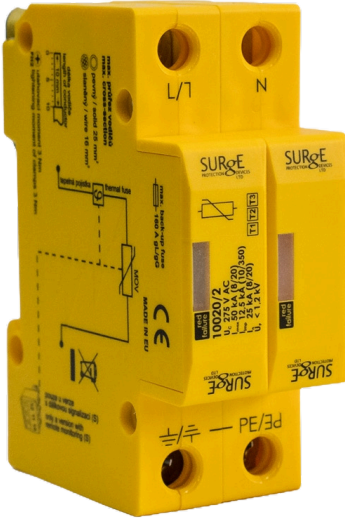

SCAN THE QR CODE FOR THE
INSTALLATION INSTRUCTIONS



Device Configurations

10020/2/ENC

10020/2
Complete in
IP Enclosure

10020/2/ENCM

10020/2
Complete in
IP Enclosure
With 63A MCB

10020/2/ENCMET

10020/2
Complete in
Metal Enclosure

10020/2/ENCMETM

10020/2
Complete in
Metal Enclosure
With 63A MCB

Technical Data	10020/2
Maximum Continuous Voltage - U_c	275V
Lightning Impulse Current 10/350 μ s - I_{imp}	12.5kA
Total Lightning Impulse Current 10/350 μ s - I_{Total}	25kA
Nominal Discharge Current 8/20 μ s - I_n	20kA
Maximum Discharge Current 8/20 μ s - I_{max}	50kA
Voltage Protection Level - U_p	$\leq 1.2kV$
Response Time - t_a	$\leq 25ns$
Tightening Torque	3Nm
Operating Temperature	-40°C to +80°C
Mounting On	35mm DIN rail
Indication of Status	Flag & Remote
Classification According to BS EN 61643-11	Type 1, 2 & 3