Tamlite Lighting
Data Sheet

Order Code: ACA4340CSM3

ACADEMY Surface module 31W - 3000K/4000K/5000K - Fixed output - Emergency



IP20 | IK06 | 5 YR

Features

- Efficacy - 103 lm/W
- Suitable for offices and schools where a low glare solution is required
- Suitable for replacement of linear fluorescent modules
- Tamlite I-Tech diffuser designed for low glare reduction to BS EN-12464 compliance
- Easy to fit construction with separate spine fixing
- CRI: Ra>80
- Tri-colour easy switch technology from cool white (5000K) or neutral white (4000K) or warm white (3000K)

Construction

- Extruded aluminium body finished in white (RAL 9010)
- Microprism PMMA diffuser
- Polycarbonate end caps

Installation Notes

Surface mount via rear entry BESA fixings or suspended via 3.0m wire suspension kit

To Specify

ACADEMY Surface module 31W - 3000K/4000K/5000K - Fixed output - Emergency as per Tamlite ACADEMY range.

Technical Data

General

Luminaire Wattage (W)	33
Weight (kg)	2.56
Operating Temperature (ta °C)	5-25°

Light Output

Lumens (lm)	3400
Efficacy (lm/W)	103
Beam Angle (FWHM°)	74

Life

L80 Lifetime (HRS)	36000
L70 Lifetime (HRS)	36000

Electrical

Input Voltage Range (VAC)	220-240
Terminal Type	4-pole grip-wire

LED

CCT (K)	TRI-COLOUR
CRI	80
Macadam Elipses	<4

Driver

Driver Lifetime (HRS)	100000

Emergency


Emergency Lumen Operating	220
Emergency Wattage (W)	2

Tamlite Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ


T: +44 (0)1952 292441
E: technical@tamlite.co.uk
W: www.tamlitelighting.co.uk

Tamlite Lighting
Data Sheet

Photometrics

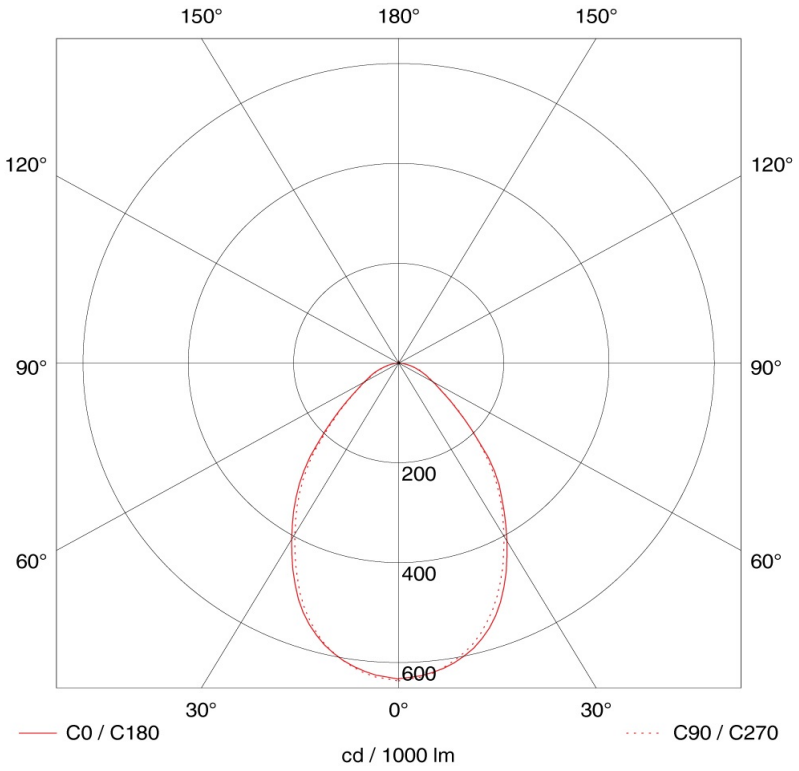

Dimensions

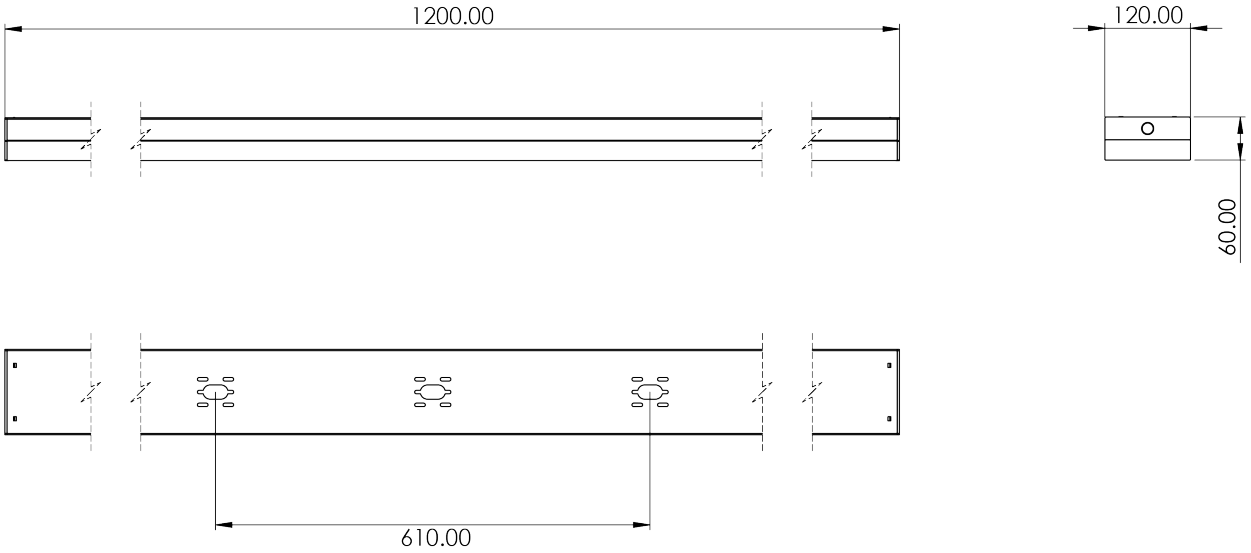

Tamlite Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: technical@tamlite.co.uk
W: www.tamlitelighting.co.uk