

**Order Code: ACA5440CS**

ACADEMY Surface module 39W - 3000K/4000K/5000K - Fixed output

### Features

- Efficacy - 113 lm/W
- Suitable for offices and schools where a low glare solution is required
- Suitable for replacement of linear fluorescent modules
- Tamlite I-Tech diffuser designed for low glare reduction to BS EN-12464 compliance
- Easy to fit construction with separate spine fixing
- CRI: Ra>80
- Tri-colour easy switch technology from cool white (5000K) or neutral white (4000K) or warm white (3000K)

### Construction

- Extruded aluminium body finished in white (RAL 9010)
- Microprism PMMA diffuser
- Polycarbonate end caps

### Installation Notes

Surface mount via rear entry BESA fixings or suspended via 3.0m wire suspension kit

### To Specify

ACADEMY Surface module 39W - 3000K/4000K/5000K - Fixed output as per Tamlite ACADEMY range.




IP20 IK06  5 YR

### Technical Data

General		Electrical	
Luminaire Wattage (W)	39	Input Voltage Range (VAC)	220-240
Weight (kg)	2.71	Terminal Type	3-pole grip-wire
Operating Temperature (ta °C)	0-25°	LED	
Light Output		CCT (K)	TRI-COLOUR
Lumens (lm)	4400	CRI	80
Efficacy (lm/W)	113	Macadam Ellipses	<4
Beam Angle (FWHM°)	74		

### Photometrics

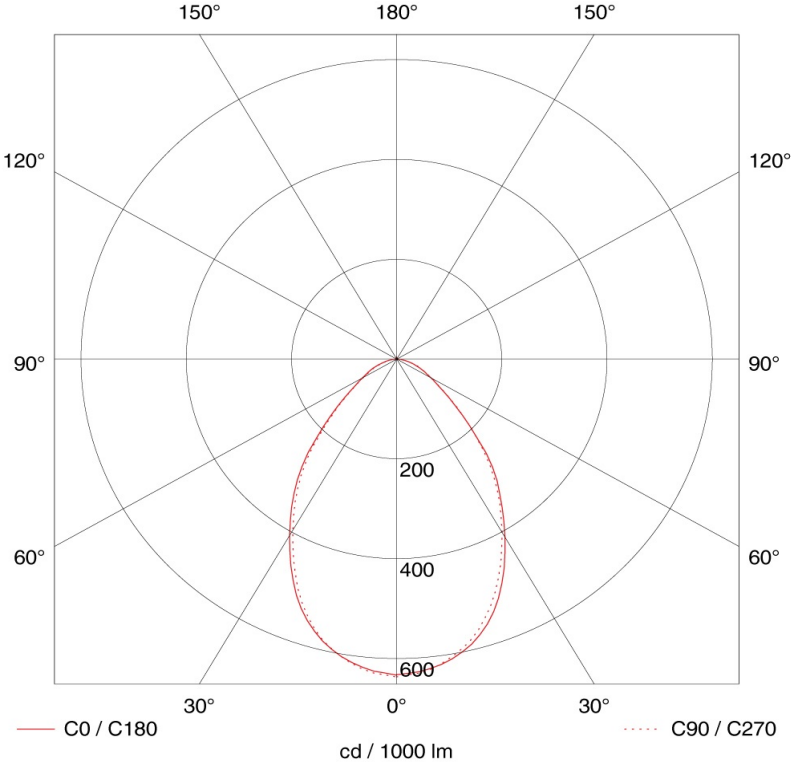

### Dimensions

