



Order Code: ACA5440CSM3

ACADEMY Surface module 39W - 3000K/4000K/5000K - Fixed output - Emergency



IP20

IK06

5 YR

Features

- Efficacy - 113 lm/W
- Suitable for offices and schools where a low glare solution is required
- Suitable for replacement of linear fluorescent modules
- Tamlite I-Tech diffuser designed for low glare reduction to BS EN-12464 compliance
- Easy to fit construction with separate spine fixing
- CRI: Ra>80
- Tri-colour easy switch technology from cool white (5000K) or neutral white (4000K) or warm white (3000K)

Construction

- Extruded aluminium body finished in white (RAL 9010)
- Microprism PMMA diffuser
- Polycarbonate end caps

Installation Notes

Surface mount via rear entry BESA fixings or suspended via 3.0m wire suspension kit

To Specify


ACADEMY Surface module 39W - 3000K/4000K/5000K - Fixed output - Emergency as per Tamlite ACADEMY range.

Technical Data

General		Electrical		Emergency	
Luminaire Wattage (W)	39	Input Voltage Range (VAC)	220-240	Emergency Lumen Operating	220
Operating Temperature (ta °C)	0-25°	Terminal Type	4-pole grip-wire		
Light Output		LED			
Lumens (lm)	4400	CCT (K)	TRI-COLOUR		
Efficacy (lm/W)	113	CRI	80		
Beam Angle (FWHM°)	74	Macadam Ellipses	<4		



Photometrics

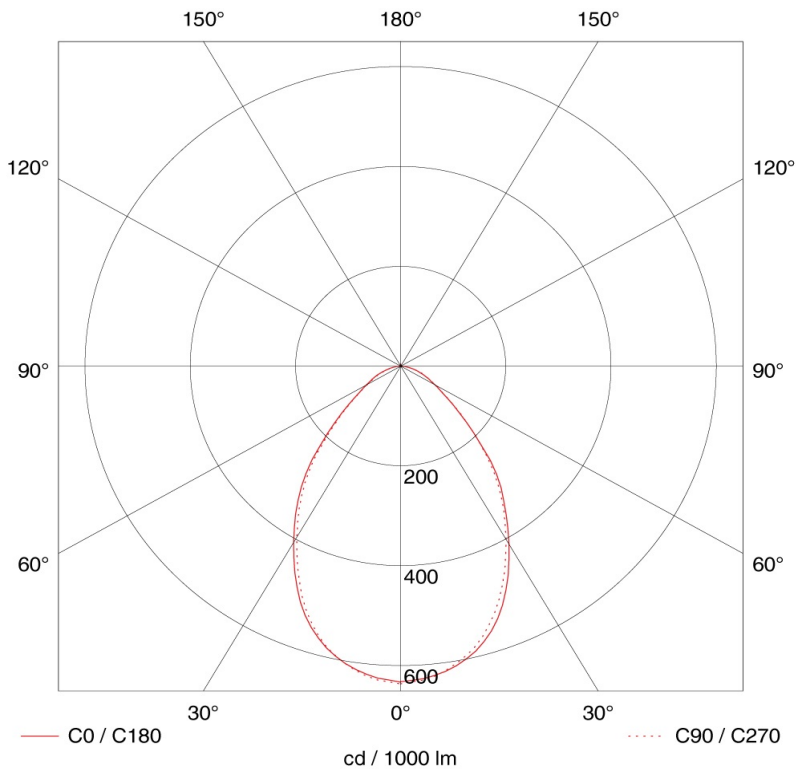

Dimensions

