



Order Code: AST300NW
ASTRO Recessed downlight 28W - 4000K - Fixed output



IP54

IK04

5 YR

Features

- Efficacy - 107 lm/W
- High output LED downlight suitable for corridors and toilets
- CRI: Ra>80
- Low glare TP(a) rated opal diffuser
- Up to 107 lumens per Watt efficacy

Construction

- Die-cast aluminium body finished in white (RAL 9010)
- Opal Polycarbonate TP(a) diffuser
- Remote driver
- Supplied as standard with neutral white (4000K) LED

Installation Notes

Recessed into plasterboard or exposed grid ceiling via spring clips and wired to 3-way connection on driver

To Specify


ASTRO Recessed downlight 28W - 4000K - Fixed output as per Tamlite ASTRO range.

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	28	Power Factor (pf)	0.93	Driver Lifetime (HRS)	50000
Weight (kg)	0.75	Input Voltage Range (VAC)	220-240		
Operating Temperature (ta °C)	0-25°	Inrush Current Peak (A)	20.4		
Light Output		Surge Protection (kV)	1		
		Terminal Type	2-pole grip-wire		
		LED			
Lumens (lm)	3000	CCT (K)	4000		
Efficacy (lm/W)	107	CRI	80		
Beam Angle (FWHM°)	95	Macadam Elipses	<4		
Life					
L90 Lifetime (HRS)	20000				
L80 Lifetime (HRS)	41000				
L70 Lifetime (HRS)	54000				



Photometrics

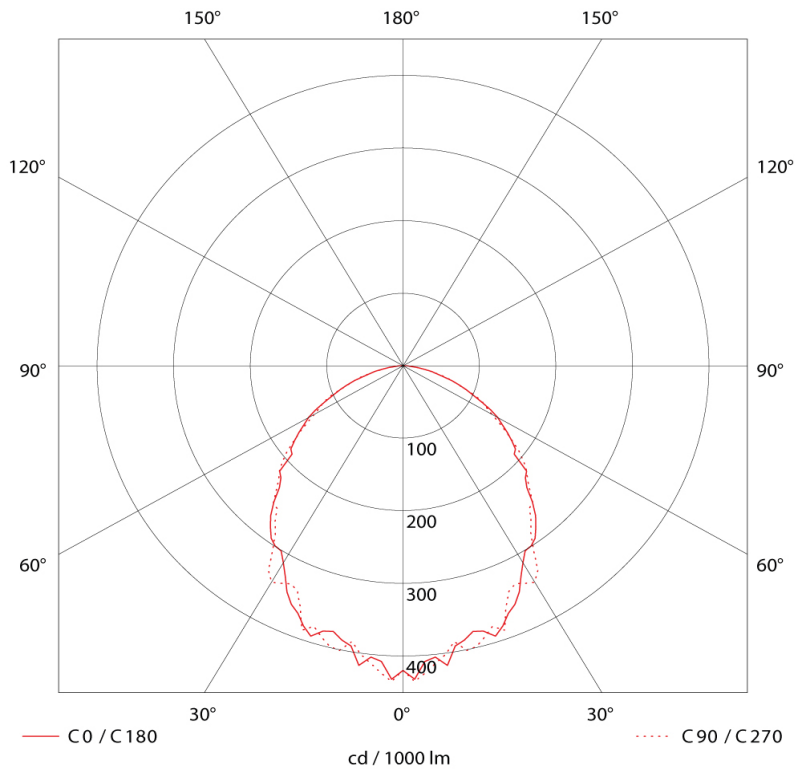

Dimensions

