

Order Code: CBU200WNWB

CITY BEAM Up/down wall light Black 17W - Wide beam - 4000K - Fixed output



Features

- Efficacy - 118 lm/W
- Suitable for interior and exterior applications
- Available in up/down or downward only models
- CRI: Ra>80
- Up to 118 lumens per Watt efficacy

Construction

- Wide (90°) Beam Angle
- Die-cast aluminium body finished in black (RAL 9005)
- Integral driver

To Specify

CITY BEAM Up/down wall light Black 17W - Wide beam - 4000K - Fixed output as per Tamlite CITY BEAM W range.

IP65

IK08




7 YRS

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	17	Rated Input Current (A)	0.08	Driver Current (mA)	200
Weight (kg)	2.97	Power Factor (pf)	0.89	Forward Voltage (V)	36
Operating Temperature (ta °C)	-25° to 25°C	Input Voltage Range (VAC)	220-240	Driver Lifetime (HRS)	100000
Light Output		Inrush Current Peak (A)	14		
Lumens (lm)	2000	Surge Protection (kV)	2		
Efficacy (lm/W)	118	Total Harmonic Distortion (THD)	<10%		
Beam Angle (FWHM°)	90	Output LF Ripple	0.05		
Life		Conductor Size (mm)	0.5 - 2.5		
L90 Lifetime (HRS)	60000	Terminal Type	3 POLE SCREW		
L80 Lifetime (HRS)	84000	LED			
L70 Lifetime (HRS)	84000	CCT (K)	4000		
		CRI	83		
		Macadam Ellipses	<3		

Photometrics

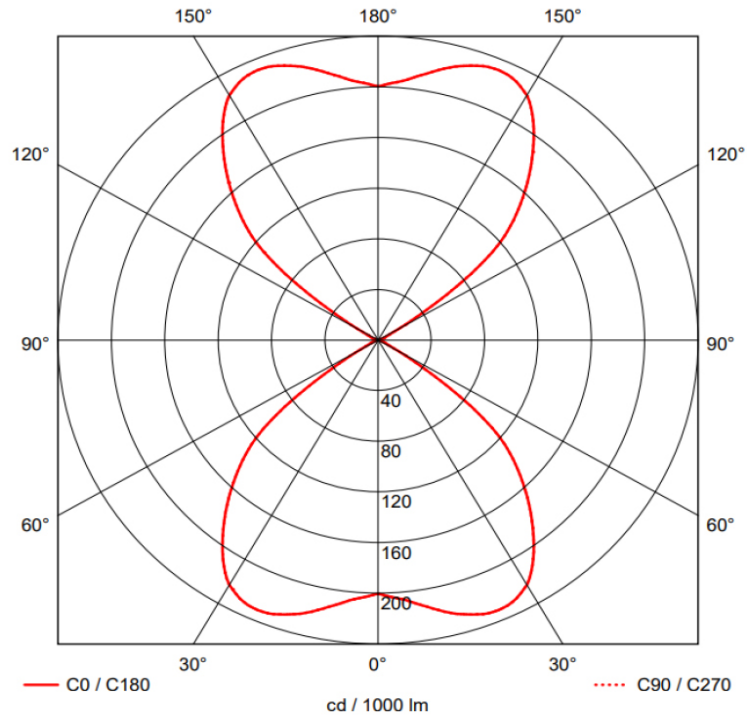

Dimensions

