Tamlite Lighting
Data Sheet

Order Code: CPTT41670NWG

CITY PT Post top lantern Grey 149W - 4000K - Area Optic - Fixed output

IP66 IK09 7 YRS

Features

- Efficacy - 112 lm/W
- Suitable for exterior building and feature lighting
- Modern, stylish post-top lantern for city beautification projects
- Photocell option available
- Polycarbonate micro optic with glass cover
- Supplied with area optic for open area/car parks
- CRI: Ra>80

Construction

To Specify

CITY PT Post top lantern Grey 149W - 4000K - Area Optic - Fixed output as per Tamlite CITY PT range.

Technical Data

General

Luminaire Wattage (W)	149
Weight (kg)	10.20
Operating Temperature (ta °C)	- 20 to 40

Light Output

Lumens (lm)	16700
Efficacy (lm/W)	112
Beam Angle (FWHM°)	142

Life

L90 Lifetime (HRS)	60000
L80 Lifetime (HRS)	84000
L70 Lifetime (HRS)	84000

Electrical

Rated Input Current (A)	0.65
Power Factor (pf)	0.99
Input Voltage Range (VAC)	220-240
Inrush Current Peak (A)	47
Surge Protection (kV)	10
Total Harmonic Distortion (THD)	20
Output LF Ripple	4
Conductor Size (mm)	3x 1mm
Terminal Type	3-CORE FLEX

LED

CCT (K)	4000
CRI	80
Macadam Elipses	<3

Driver

Driver Current (mA)	850
Driver Lifetime (HRS)	100000

Tamlite Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: technical@tamlite.co.uk
W: www.tamlite.co.uk

Generated on: 14/06/2023 10:23am
Produced by Tamlite Lighting

Photometrics

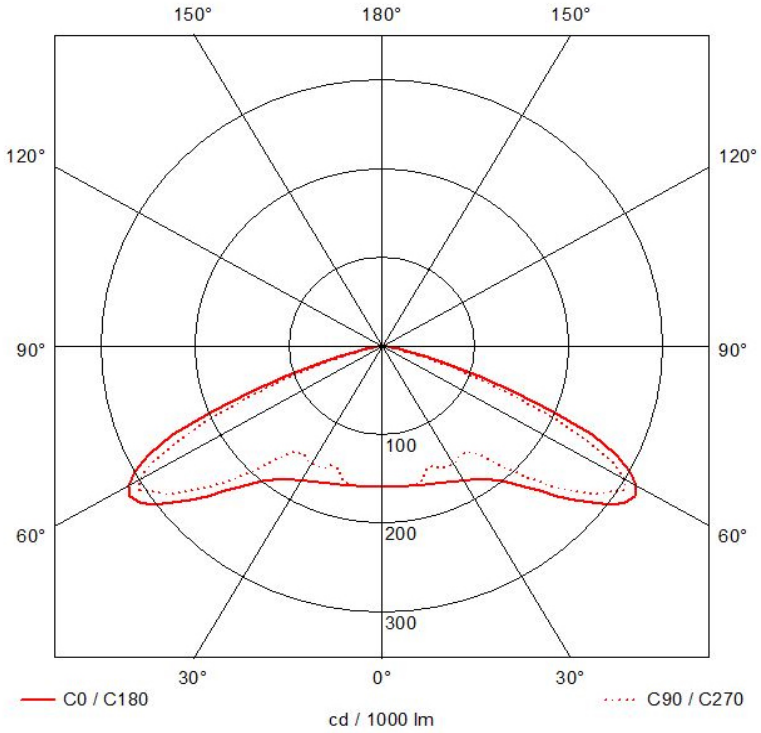

Dimensions

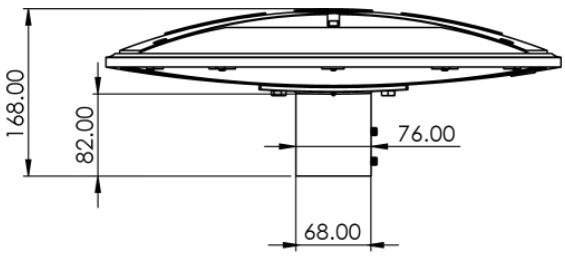

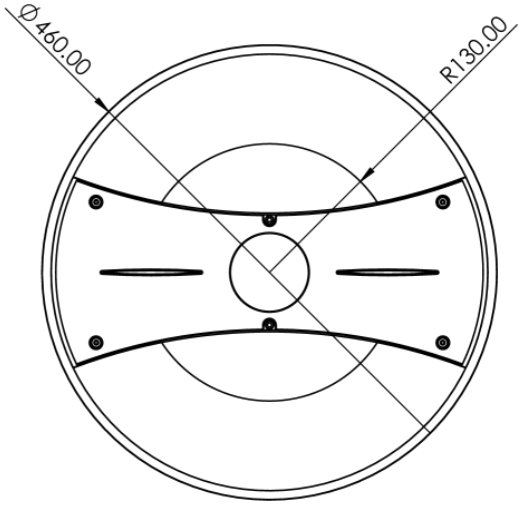

Tamlite Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: technical@tamlite.co.uk
W: www.tamlite.co.uk