

Order Code: CWP280NWB

CITY WP Exterior wall light Black 28W - 4000K - Fixed output



Features

- Efficacy - 100 lm/W
- Available in 3 outputs
- Dark sky optic to reduce upward light output with less than 2% ULOR
- High performance circular wall light
- Maximum of 10m spacing, at 3m mounting height
- CRI: Ra>80
- Up to 100 lumens per Watt efficacy

Construction

- Die-cast aluminium body finished in black (RAL 9005)
- Supplied as standard with neutral white (4000K) LED

Installation Notes

Fixed via rear mounting plate and wired via cable entry
To Specify

CITY WP Exterior wall light Black 28W - 4000K - Fixed output as per Tamlite CITY WP range.

IP65

IK08




5 YR

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	28	Rated Input Current (A)	0.13	Driver Current (mA)	600
Weight (kg)	2.80	Power Factor (pf)	0.95	Forward Voltage (V)	42-48
Operating Temperature (ta °C)	-20° to 25°	Input Voltage Range (VAC)	220-240	Driver Lifetime (HRS)	50000
		Inrush Current Peak (A)	4.6		
		Surge Protection (kV)	2		
		Total Harmonic Distortion (THD)	20		
		Output LF Ripple	±4		
		Terminal Type	3-POLE GRIP-WIRE		
Light Output		LED			
Lumens (lm)	2800	CCT (K)	4000		
Efficacy (lm/W)	100	CRI	80		
Beam Angle (FWHM°)	140	Macadam Ellipses	<3		
Life					
L90 Lifetime (HRS)	57300				
L80 Lifetime (HRS)	84000				
L70 Lifetime (HRS)	84000				

Photometrics

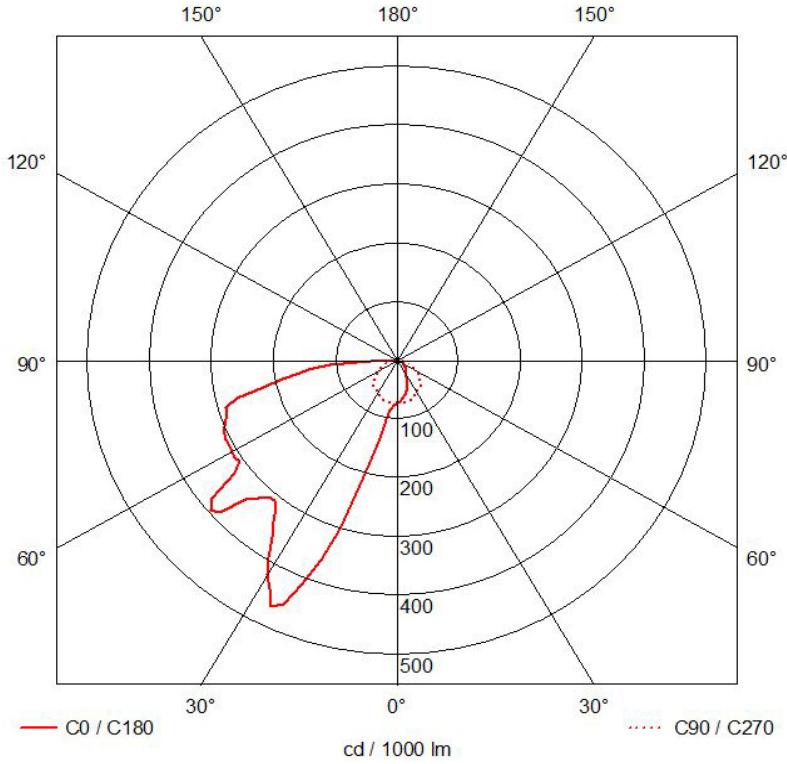

Dimensions

