

Order Code: CWP280NWG

CITY WP Exterior wall light Grey 28W - 4000K - Fixed output



Features

- Efficacy - 100 lm/W
- Suitable for exterior building and feature lighting
- Available in 3 outputs
- Dark sky optic to reduce upward light output with less than 2% ULOR
- High performance circular wall light
- Maximum of 10m spacing, at 3m mounting height
- Emergency option available
- CRI: Ra>80
- Up to 100 lumens per Watt efficacy

Construction

- Die-cast aluminium body finished in grey (RAL 9006) or black (RAL 9005)
- Supplied as standard with neutral white (4000K) LED

To Specify


CITY WP Exterior wall light Grey 28W - 4000K - Fixed output as per Tamlite CITY WP range.

IP65 IK08  7 YRS

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	28	Rated Input Current (A)	0.13	Driver Current (mA)	600
Weight (kg)	2.80	Power Factor (pf)	0.97	Forward Voltage (V)	42-48
Operating Temperature (ta °C)	-20° to 25°	Input Voltage Range (VAC)	220-240	Driver Lifetime (HRS)	50000
Light Output		Inrush Current Peak (A)	4.6		
Lumens (lm)	2800	Surge Protection (kV)	2		
Efficacy (lm/W)	100	Total Harmonic Distortion (THD)	20		
Beam Angle (FWHM°)	140	Output LF Ripple	±4		
Life		Terminal Type	3-POLE GRIP-WIRE		
L90 Lifetime (HRS)	57300	LED			
L80 Lifetime (HRS)	84000	CCT (K)	4000		
L70 Lifetime (HRS)	84000	CRI	80		
		Macadam Ellipses	<3		

Photometrics

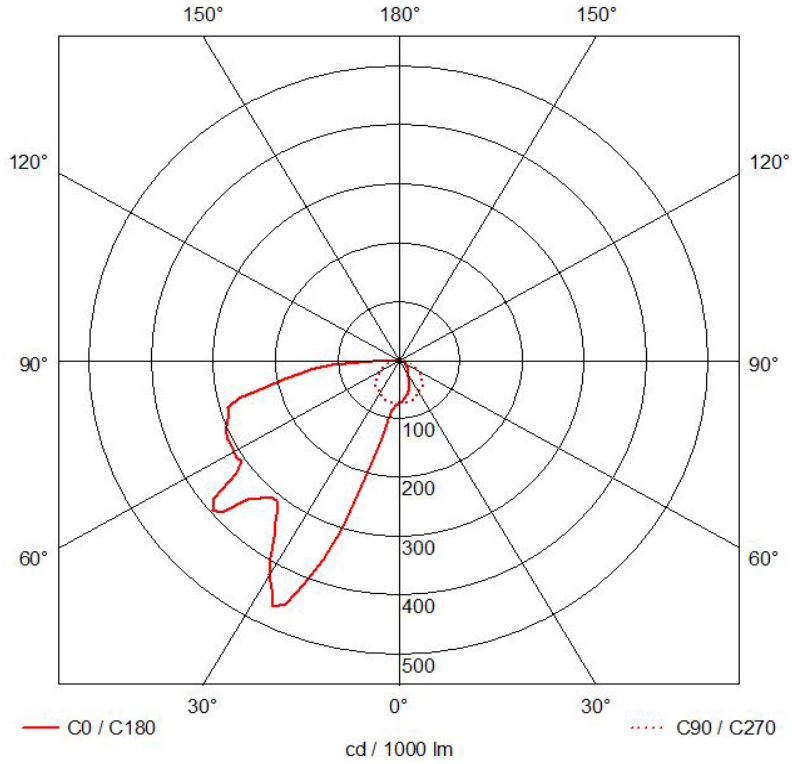

Dimensions

