

Order Code: CYP4670NW
CYCLONE P Linear IP66 weatherproof 45W - 4000K - Fixed output



IP66

IK08



7 YRS

Features

- Efficacy - 149 lm/W
- Suitable for internal or external use in industrial-warehousing areas
- PIR and microwave sensor options
- Moisture-proof, dust-resistant and chemical-resistant IP66 fixture
- CRI: Ra>80
- Polycarbonate Plastic body with Polycarbonate Opal diffuser

Construction

- Integral driver
- Stainless steel fixing clips
- Loop in/out cable entries
- Supplied as standard with neutral white (4000K) LED


To Specify

CYCLONE P Linear IP66 weatherproof 45W - 4000K - Fixed output
as per Tamlite CYCLONE P range.

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	45	Rated Input Current (A)	0.2	Driver Current (mA)	900
Weight (kg)	2.10	Power Factor (pf)	0.97		
Operating Temperature (ta °C)	-20°C to 25°C	Input Voltage Range (VAC)	220-240		
		Surge Protection (kV)	1		
Light Output		Total Harmonic Distortion (THD)	<5%		
Lumens (lm)	6700	Output LF Ripple	±5%		
Efficacy (lm/W)	149	Terminal Type	3-POLE GRIP-WIRE		
Beam Angle (FWHM°)	128	LED			
Life		CCT (K)	4000		
L90 Lifetime (HRS)	42000	CRI	80		
L80 Lifetime (HRS)	60000	Macadam Ellipses	<3		
L70 Lifetime (HRS)	60000				

Photometrics

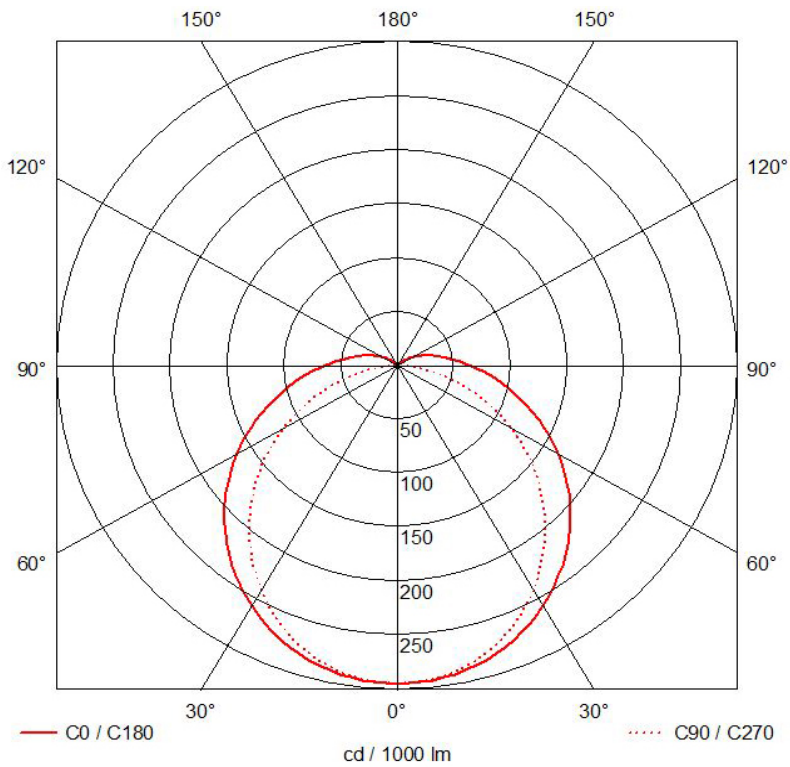

Dimensions

