Tamlite Lighting

Data sheet

ELITE SL

Recessed emergency downlight



5 YR IP20

Features:

Recessed downlight for open areas and escape routes
Virtually service free emergency lighting
Easy to install with simple connection wiring
Available as basic, DALI and auto self-test versions
Small ceiling hole 40-43mm with 80mm height
Very low stand-by power loss
Maintained and non-maintained versions
Available with e- CONNECT (https://tamlite.co.uk/sectors/emergency/e-connect/)

Construction:

Polycarbonate body finished in white
Lithium iron phosphate (LiFePO4) batteries
Integral driver
Supplied as standard with daylight (6500K) LED

Options:

A3 - Emergency self test
D3 - DALI self test

Tamlite Lighting

Data sheet

ELITE SL

Recessed emergency downlight

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
ELSLNM3	2W - 6500K	200	2	100	0.22

Dimensions

All dimensions are in millimetres

Order code	C	Diameter	Cut out
ELSLNM3	80	51	40-43

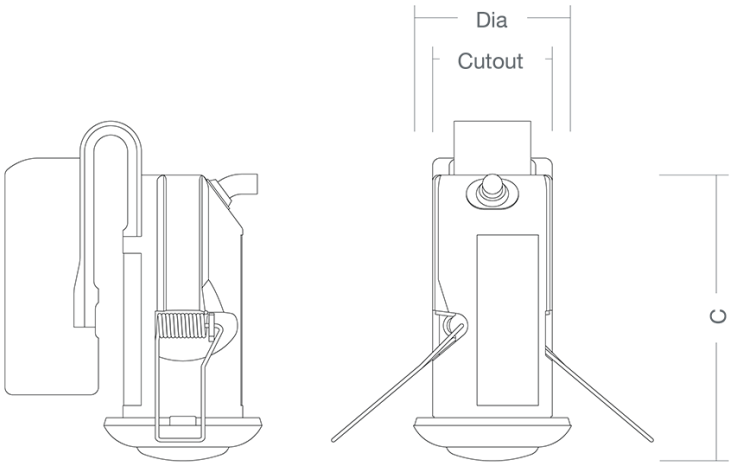

Installation instructions:

Recessed fix via fixing springs and wired via 3-way termination box

To specify:

Recessed compact LED emergency downlight as per Tamlite ELITE SL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.

Tamlite Sales Centre.
Tel: 01527 517777
Fax: 01527 517666
e-mail: sales@tamlite.co.uk

Tamlite Technical.
Tel: 01952 292441
Fax: 01952 292155
e-mail: technical@tamlite.co.uk