




FEATURES

- LPCB Approved
- CPD certified to EN54 part 3
- High sound out put
- 32 selectable tones
- Automatic synchronisation
- Volume control -10dB adjustment
- Second tone for two stage alarm
- Easy to install
- Range of bases
- Weatherproof Available

SPECIFICATION

- Operating voltage ~ 9 -28V DC
- Operating temperature ~ -25°C to +70°C
- Volume ~ 102dB
- Running current ~ 16mA
- ABS flame retardant
- Coloured red as standard (white option)
- IP42

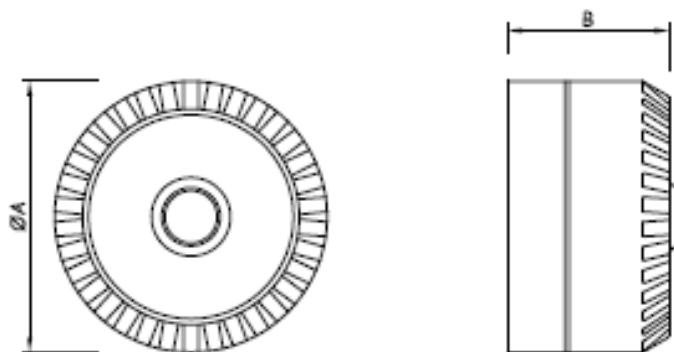

Sounders

Order Code	Description	Wgt (KG)	Dimensions (mm)	
			A	B
FS109S	Electronic Sounder	0.17	93	63
FS109S/DP	Weatherproof Electronic Sounder	0.20	93	121