

Order Code: IKN120MBNW

IKON Recessed downlight 10W - 4000K - Medium beam - Fixed output



Features

- Suitable for general and accent areas or retail applications
- Anodised polished aluminium reflector
- Recessed downlight with high output reflector
- CRI: Ra>80
- Supplied as standard with neutral white (4000K) LED
- Efficacy - 120 lm/W

Construction

- Die-cast aluminium body
- White trim (RAL 9016)
- Remote driver

Installation Notes

Recessed into plasterboard or exposed grid ceiling via spring clips
To Specify

IKON Recessed downlight 10W - 4000K - Medium beam - Fixed output as per Tamlite IKON range.

IP20

IK04




5 YR

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	10	Rated Input Current (A)	0.05	Driver Current (mA)	300
Weight (kg)	1.15	Power Factor (pf)	0.91	Forward Voltage (V)	32
Operating Temperature (ta °C)	0° - 25°	Input Voltage Range (VAC)	220-240	Driver Lifetime (HRS)	50000
Light Output		Inrush Current Peak (A)	4.4		
Lumens (lm)	1200	Surge Protection (kV)	1		
Efficacy (lm/W)	120	Total Harmonic Distortion (THD)	<20%		
Beam Angle (FWHM°)	43	Output LF Ripple	±4%		
Life		Conductor Size (mm)	0.75 - 2.5		
L90 Lifetime (HRS)	50000	Terminal Type	3-pole grip-wire		
L80 Lifetime (HRS)	50000	LED			
L70 Lifetime (HRS)	50000	CCT (K)	4000		
		CRI	80		
		Macadam Ellipses	<3		

Photometrics

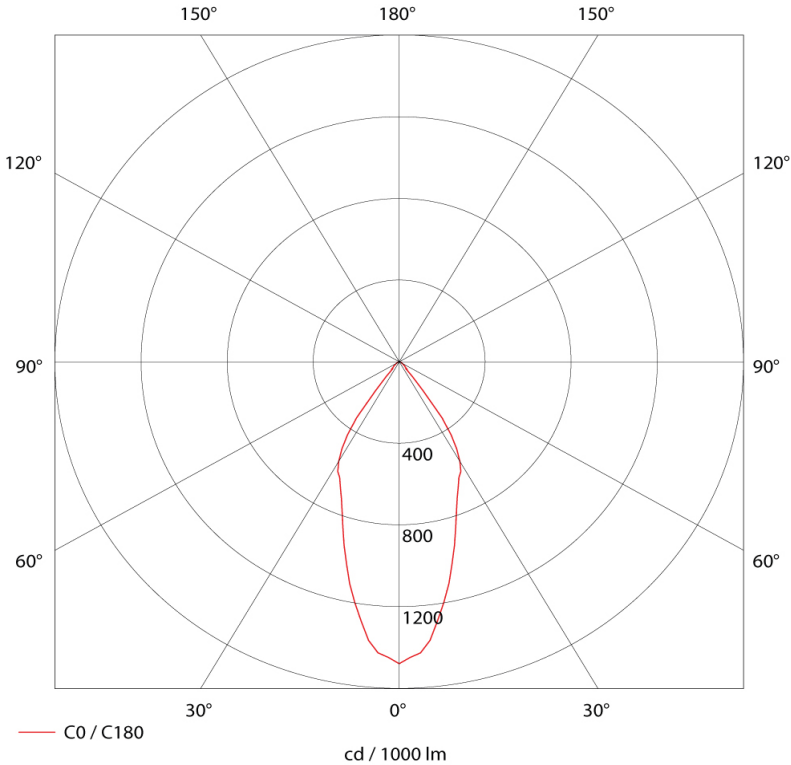

Dimensions

