

### Order Code: IKN200MBNW

IKON Recessed downlight 18W - 4000K - Medium beam - Fixed output



#### Features

- Efficacy - 111 lm/W
- Suitable for general and accent areas or retail applications
- Anodised polished aluminium reflector
- Recessed downlight with high output reflector
- CRI: Ra>80

#### Construction

- Die-cast aluminium body
- White trim (RAL 9016)
- Remote driver

#### Installation Notes

Recessed into plasterboard or exposed grid ceiling via spring clips  
To Specify


IKON Recessed downlight 18W - 4000K - Medium beam - Fixed output as per Tamlite IKON range.

IP20 IK04  5 YR

#### Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	18	Rated Input Current (A)	0.08	Driver Current (mA)	475
Weight (kg)	1.15	Power Factor (pf)	0.95	Forward Voltage (V)	32
Operating Temperature (ta °C)	0° - 25°	Input Voltage Range (VAC)	220-240	Driver Lifetime (HRS)	50000
<b>Light Output</b>		Inrush Current Peak (A)	4.4		
Lumens (lm)	2000	Surge Protection (kV)	1		
Efficacy (lm/W)	111	Total Harmonic Distortion (THD)	<20%		
Beam Angle (FWHM°)	43	Output LF Ripple	±4%		
<b>Life</b>		Conductor Size (mm)	0.75 - 2.5		
L90 Lifetime (HRS)	50000	Terminal Type	3-pole grip-wire		
L80 Lifetime (HRS)	50000	<b>LED</b>			
L70 Lifetime (HRS)	50000	CCT (K)	4000		
		CRI	80		
		Macadam Ellipses	<3		

### Photometrics

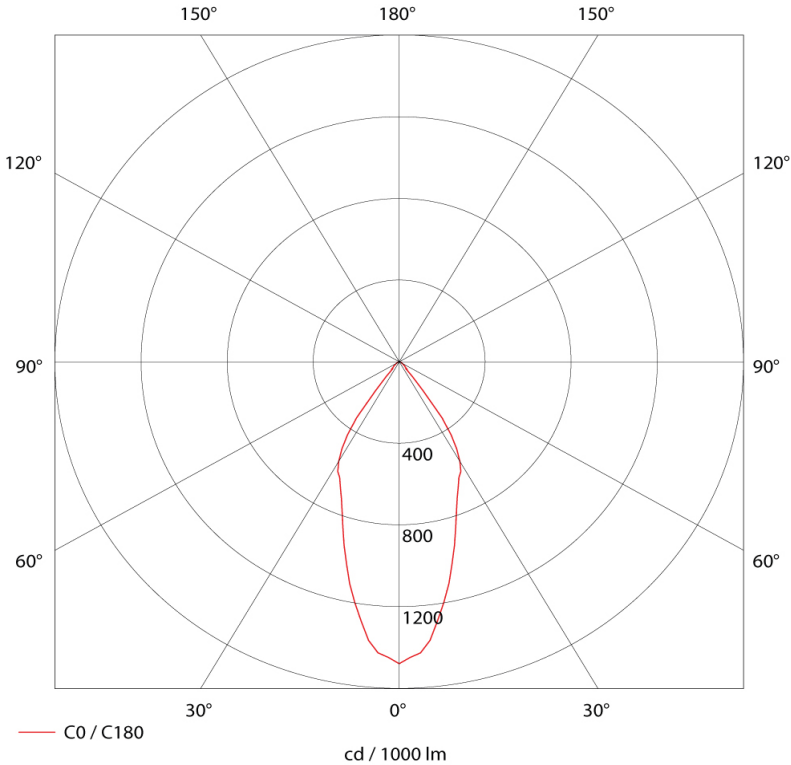

### Dimensions

