



Order Code: IKN400MBNWM3
IKON Recessed downlight 38W - 4000K - Medium beam - Fixed output - Emergency



IP20

IK04

5 YR

Features

- Efficacy - 105 lm/W
- Suitable for general and accent areas or retail applications
- Anodised polished aluminium reflector
- Recessed downlight with high output reflector
- CRI: Ra>80

Construction

- Die-cast aluminium body
- White trim (RAL 9016)
- Remote driver

Installation Notes

Recessed into plasterboard or exposed grid ceiling via spring clips
To Specify


IKON Recessed downlight 38W - 4000K - Medium beam - Fixed output - Emergency as per Tamlite IKON range.

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	38	Rated Input Current (A)	0.18	Driver Current (mA)	1000
Operating Temperature (ta °C)	5° - 25°	Power Factor (pf)	0.97	Forward Voltage (V)	34
Light Output		Input Voltage Range (VAC)	220-240	Driver Lifetime (HRS)	50000
Lumens (lm)	4000	Inrush Current Peak (A)	23.5	Emergency	
Efficacy (lm/W)	105	Surge Protection (kV)	1	Emergency Lumen Operating	270
Beam Angle (FWHM°)	43	Total Harmonic Distortion (THD)	<20%	Emergency Wattage (W)	3
Life		Output LF Ripple	±4%		
L90 Lifetime (HRS)	50000	Conductor Size (mm)	0.5 - 2.5		
L80 Lifetime (HRS)	50000	Terminal Type	4-pole grip-wire		
L70 Lifetime (HRS)	50000	LED			
		CCT (K)	4000		
		CRI	80		
		Macadam Ellipses	<3		



Photometrics

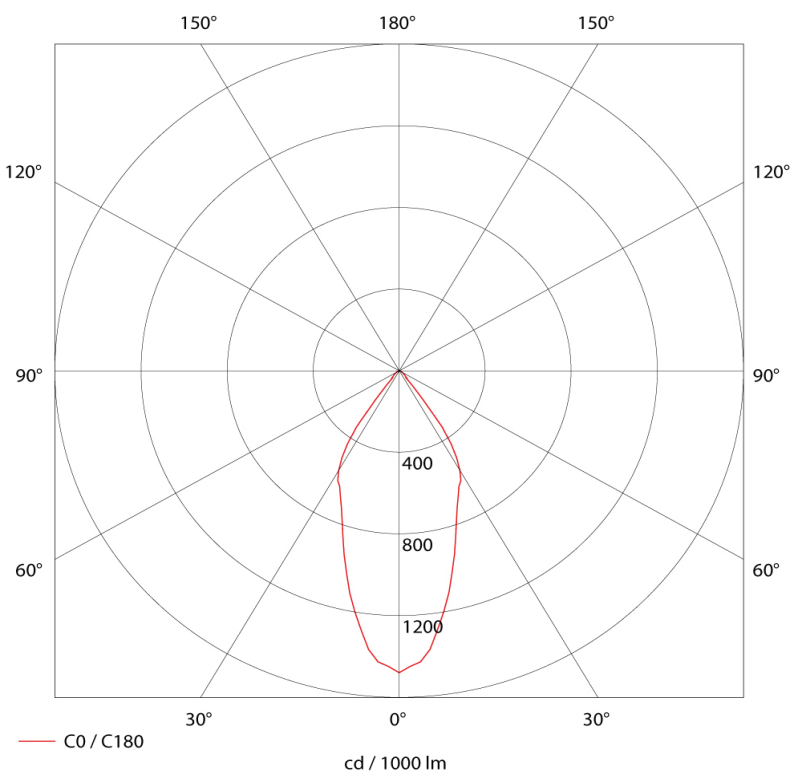

Dimensions

