


**Order Code:** MBL123330NW

MODLED Recessed module 27W - 4000K - Fixed output

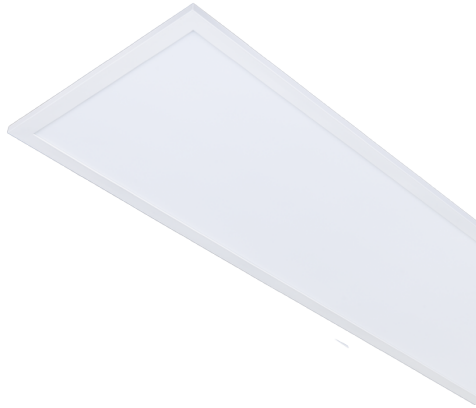

IP44

IK04



5 YR

### Features

- Efficacy - 122 lm/W
- Suitable for use in offices, schools and universities and general circulation
- Modular dimensions allow easy install in most exposed T-bar ceilings
- More consistent and uniform appearance than traditional edge-lit panels
- CRI: Ra>80

### Construction

- Extruded aluminium body finished in white (RAL 9010)
- Opal PMMA diffuser
- Integral driver
- Supplied as standard with neutral white (4000K) LED

### Installation Notes


Recessed into exposed T-Bar ceiling with connection to remote driver. (surface fix via Tamlite SB accessory)  
To Specify

MODLED Recessed module 27W - 4000K - Fixed output as per Tamlite MODLED range.

### Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	27	Rated Input Current (A)	0.12	Driver Current (mA)	700
Weight (kg)	2.17	Power Factor (pf)	0.95	Forward Voltage (V)	40-50
Operating Temperature (ta °C)	5° - 25°	Input Voltage Range (VAC)	220-240	Driver Lifetime (HRS)	50000
<b>Light Output</b>		Inrush Current Peak (A)	18		
Lumens (lm)	3300	Surge Protection (kV)	1		
Efficacy (lm/W)	122	Total Harmonic Distortion (THD)	<15%		
Beam Angle (FWHM°)	91	Output LF Ripple	±5%		
<b>Life</b>		Conductor Size (mm)	0.75 - 1.5		
L90 Lifetime (HRS)	46000	Terminal Type	2-pole grip-wire		
L80 Lifetime (HRS)	54000	<b>LED</b>			
L70 Lifetime (HRS)	54000	CCT (K)	4000		
		CRI	80		
		Macadam Ellipses	<3		

### Photometrics

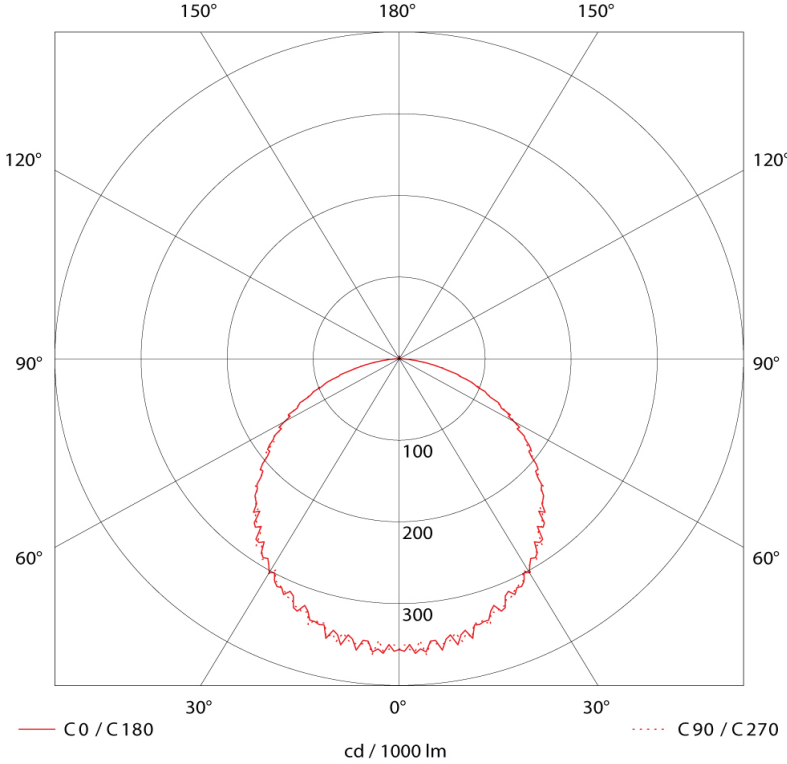

### Dimensions

