




Order Code: MBL123440NW
MODLED Recessed module 35W - 4000K - Fixed output

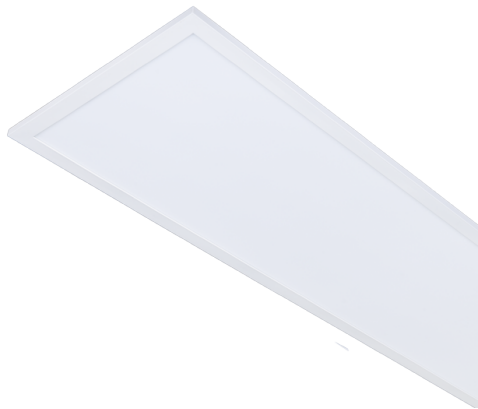

IP44

IK04

5 YR

Features

- Efficacy - 126 lm/W
- Suitable for use in offices, schools and universities and general circulation
- Modular dimensions allow easy install in most exposed T-bar ceilings
- More consistent and uniform appearance than traditional edge-lit panels
- CRI: Ra>80

Construction

- Extruded aluminium body finished in white (RAL 9010)
- Opal PMMA diffuser
- Integral driver
- Supplied as standard with neutral white (4000K) LED

Installation Notes

Recessed into exposed T-Bar ceiling with connection to remote driver. (surface fix via Tamlite SB accessory)
To Specify


MODLED Recessed module 35W - 4000K - Fixed output as per Tamlite MODLED range.

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	35	Rated Input Current (A)	0.17	Driver Current (mA)	885
Weight (kg)	2.17	Power Factor (pf)	0.98		
Operating Temperature (ta °C)	0° to 25°	Input Voltage Range (VAC)	220 to 240		
Light Output		Inrush Current Peak (A)	25		
Lumens (lm)	4400	Surge Protection (kV)	1		
Efficacy (lm/W)	126	Total Harmonic Distortion (THD)	<20%		
Beam Angle (FWHM°)	91	Output LF Ripple	?4%		
Life		Conductor Size (mm)	0.75 to 2.5		
L90 Lifetime (HRS)	46000	Terminal Type	3-pole grip-wire		
L80 Lifetime (HRS)	54000	LED			
L70 Lifetime (HRS)	54000	CCT (K)	4000		
		CRI	80		
		Macadam Ellipses	<3		



Photometrics

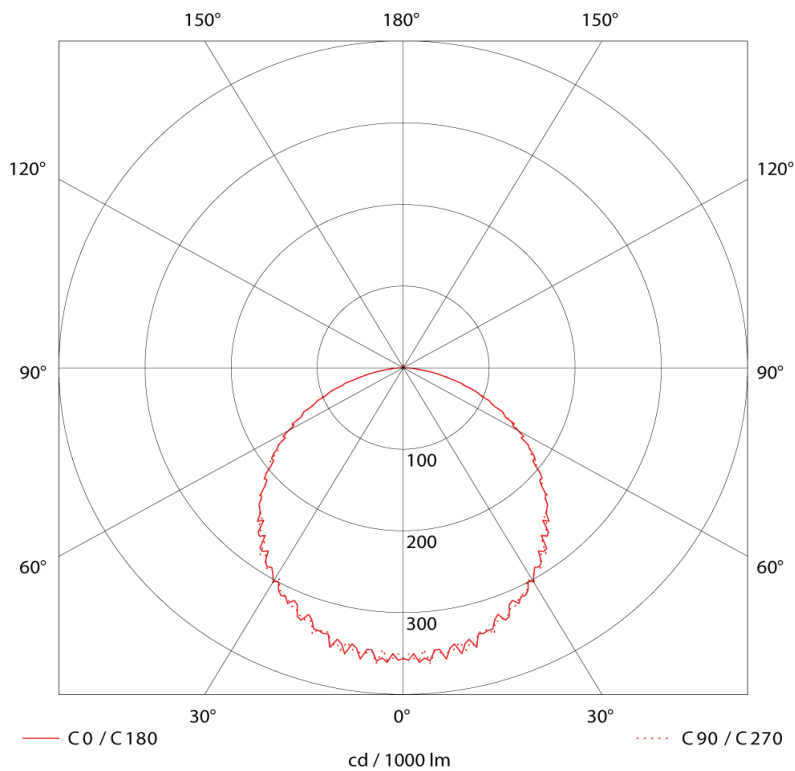

Dimensions

