




Order Code: MBL126600NW
MODLED Recessed module 54W - 4000K - Fixed output

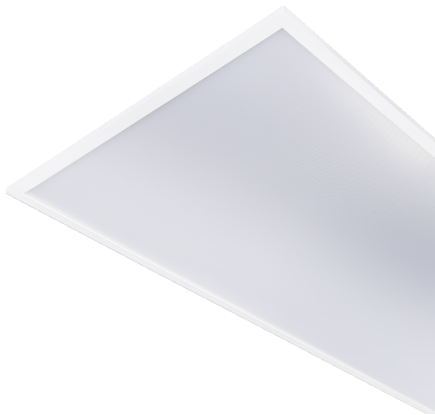

IP44

IK04

5 YR

Features

- Efficacy - 111 lm/W
- Suitable for use in offices, schools and universities and general circulation
- Modular dimensions allow easy install in most exposed T-bar ceilings
- More consistent and uniform appearance than traditional edge-lit panels
- CRI: Ra>80

Construction

- Extruded aluminium body finished in white (RAL 9010)
- Opal PMMA diffuser
- Integral driver
- Supplied as standard with neutral white (4000K) LED

Installation Notes


Recessed into exposed T-Bar ceiling with connection to remote driver. (surface fix via Tamlite SB accessory)
To Specify

MODLED Recessed module 54W - 4000K - Fixed output as per Tamlite MODLED range.

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	54	Input Voltage Range (VAC)	220-240	Driver Current (mA)	1200
Weight (kg)	2.17	Conductor Size (mm)	0.75 - 2.5	Forward Voltage (V)	42-48
Operating Temperature (ta °C)	5° - 25°	Terminal Type	3-pole grip-wire		
Light Output		LED			
Lumens (lm)	6000	CCT (K)	4000		
Efficacy (lm/W)	111	CRI	80		
Beam Angle (FWHM°)	91	Macadam Ellipses	<3		
Life					
L90 Lifetime (HRS)	46000				
L80 Lifetime (HRS)	54000				
L70 Lifetime (HRS)	54000				

Photometrics

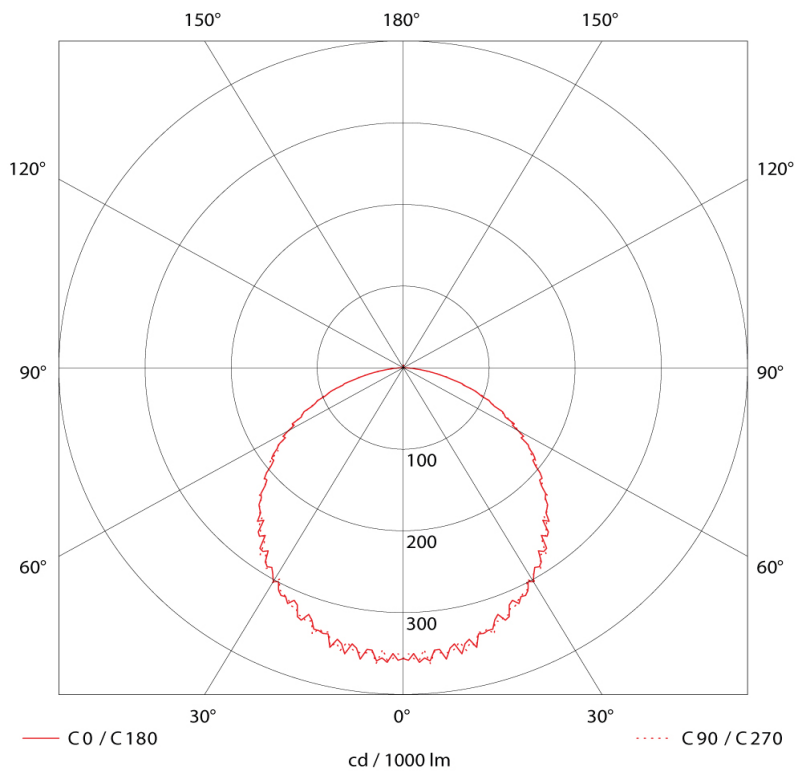

Dimensions

