

Order Code: NMB250WW
NIMBUS Recessed Downlight 22W - Fixed Output - 3000K



Features


- Efficacy - 114 lm/W
- Low profile recessed downlight suitable for corridors and toilets
- CRI: Ra>80

Construction

- Die-cast aluminium body finished in white (RAL 9010)
- Low glare Tp(b) rated opal PMMA diffuser
- Remote driver
- Supplied in neutral white (4000K) LED

To Specify


NIMBUS Recessed Downlight 22W - Fixed Output - 3000K as per Tamlite NIMBUS range.

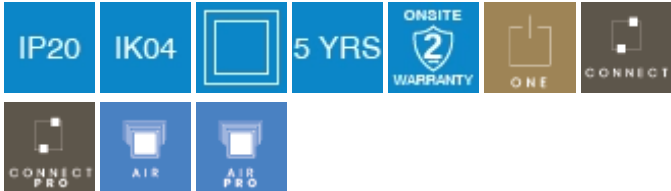

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	22	Rated Input Current (A)	0.11	Driver Current (mA)	550
Weight (kg)	0.73	Power Factor (pf)	0.95	Forward Voltage (V)	35-45
Operating Temperature (°C)	0 to 25	Input Voltage Range (VAC)	200-240	Driver Lifetime (HRS)	50000
Light Output		Inrush Current Peak (A)	30		
Lumens (lm)	2500	Surge Protection (kV)	2		
Efficacy (lm/W)	114	Total Harmonic Distortion (THD)	<20%		
Beam Angle (FWHM°)	116	Output LF Ripple	±1%		
Life		Conductor Size (mm)	0.75		
L90 Lifetime (HRS)	20000	Terminal Type	2-pole screw		
L80 Lifetime (HRS)	41000	LED			
L70 Lifetime (HRS)	64000	CCT (K)	3000		
		CRI	80		
		Macadam Ellipses	<4		

Photometrics

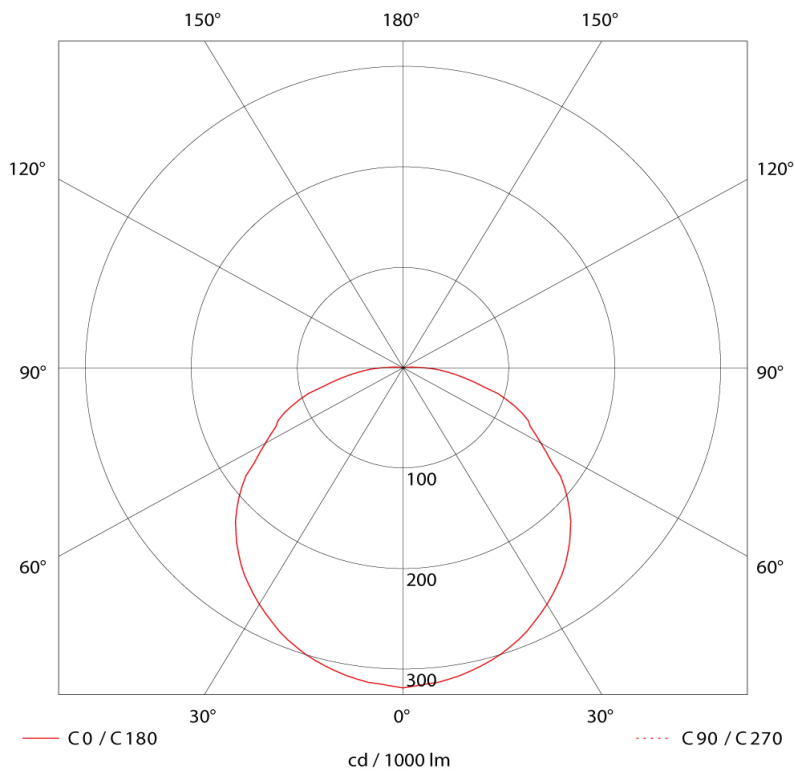

Dimensions

