Tamlite Lighting
Data Sheet

Order Code: SNT200MNWB

SONATA Track spot Black 17W - 4000K - Medium beam - Fixed output



IP40 | IK08 | 5 YR

Features

- Efficacy - 118 lm/W
- LED track spot for retail and decorative applications
- Supplied with TRIO 3-circuit track adapter
- CRI: Ra>80

Construction

- Die-cast aluminium body finished in black (RAL 9005)
- Supplied as standard with neutral white (4000K) LED

Installation Notes

Track mounted via 3 circuit track adapter

To Specify

SONATA Track spot Black 17W - 4000K - Medium beam - Fixed output as per Tamlite SONATA range.

Technical Data

General

Luminaire Wattage (W)	17
Weight (kg)	0.69
Operating Temperature (ta °C)	0° - 25°

Light Output

Lumens (lm)	2000
Efficacy (lm/W)	118
Beam Angle (FWHM°)	40

Life

L90 Lifetime (HRS)	72000
L80 Lifetime (HRS)	84000
L70 Lifetime (HRS)	90000

Electrical

Rated Input Current (A)	0.08
Power Factor (pf)	0.97
Input Voltage Range (VAC)	220-240
Inrush Current Peak (A)	8
Surge Protection (kV)	1
Total Harmonic Distortion (THD)	<15%
Output LF Ripple	±3%
Terminal Type	TRACK ADAPTOR

LED

CCT (K)	4000
CRI	80
Macadam Elipses	<3

Driver


Driver Current (mA)	400
Forward Voltage (V)	33-38
Driver Lifetime (HRS)	100000

Tamlite Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ


T: +44 (0)1952 292441
E: technical@tamlite.co.uk
W: www.tamlitelighting.co.uk

Tamlite Lighting
Data Sheet

Photometrics

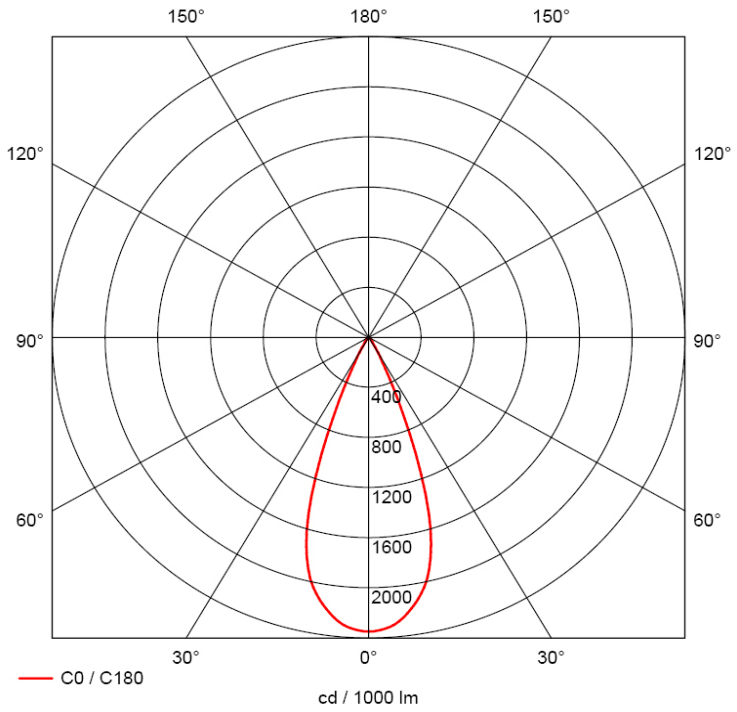

Dimensions

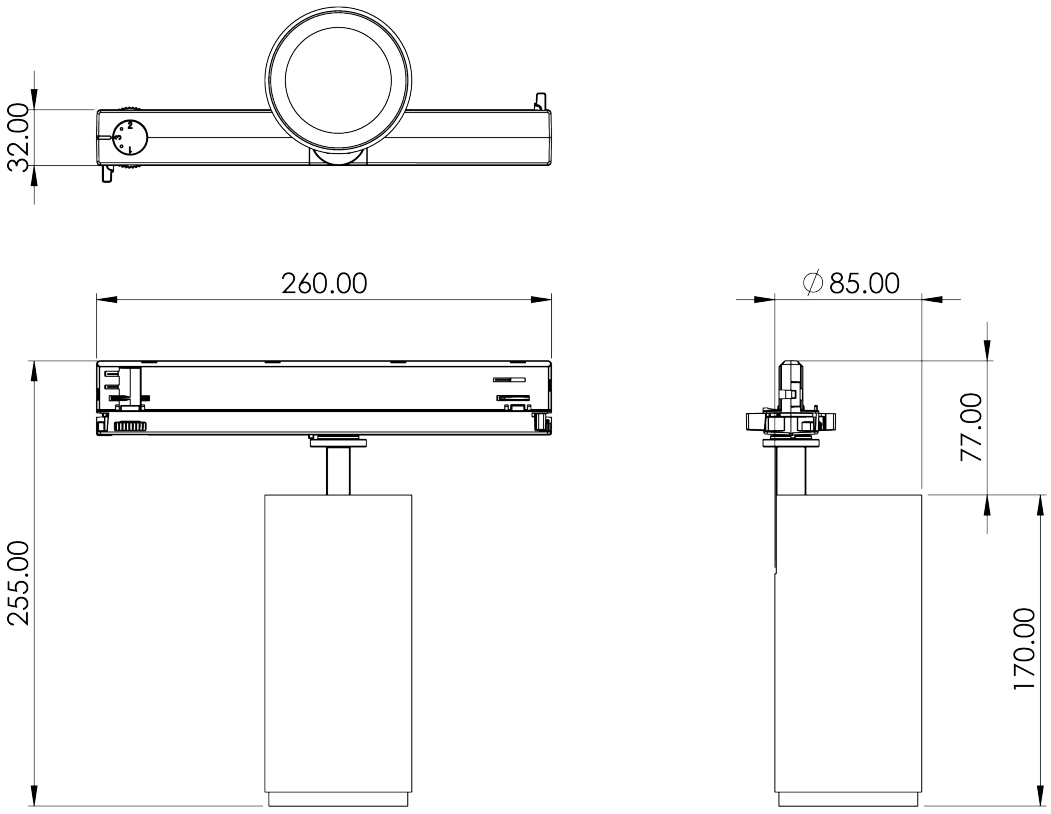

Tamlite Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: technical@tamlite.co.uk
W: www.tamlitelighting.co.uk

Generated on: 16/08/2022 8:23am
Produced by Tamlite Lighting