



Order Code: SNT280MNBW
SONATA Track spot Black 25W - 4000K - Medium beam - Fixed output



IP40

IK08

5 YR

Features

- Efficacy - 112 lm/W
- LED track spot for retail and decorative applications
- Supplied with TRIO 3-circuit track adapter
- CRI: Ra>80

Construction

- Die-cast aluminium body finished in black (RAL 9005)
- Supplied as standard with neutral white (4000K) LED

Installation Notes

Track mounted via 3 circuit track adapter
To Specify


SONATA Track spot Black 25W - 4000K - Medium beam - Fixed output as per Tamlite SONATA range.

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	25	Rated Input Current (A)	0.11	Driver Current (mA)	600
Weight (kg)	0.69	Power Factor (pf)	0.97	Forward Voltage (V)	33-38
Operating Temperature (ta °C)	0° - 25°	Input Voltage Range (VAC)	220-240	Driver Lifetime (HRS)	100000
Light Output		Inrush Current Peak (A)	8		
Lumens (lm)	2800	Surge Protection (kV)	1		
Efficacy (lm/W)	112	Total Harmonic Distortion (THD)	<15%		
Beam Angle (FWHM°)	40	Output LF Ripple	±3%		
Life		Terminal Type	TRACK ADAPTOR		
L90 Lifetime (HRS)	72000	LED			
L80 Lifetime (HRS)	84000	CCT (K)	4000		
L70 Lifetime (HRS)	90000	CRI	80		
		Macadam Elipses	<3		



Photometrics

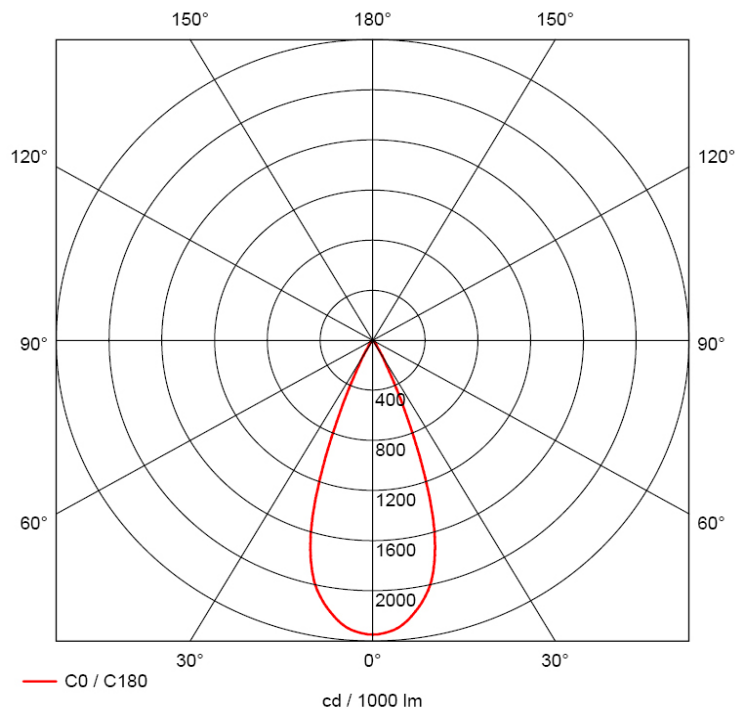

Dimensions

