

Order Code: TBX2140NW

TBX Batten 9W - 4000K - Fixed output

Features

- Efficacy - 156 lm/W
- Suitable for general use in industrial-warehousing or commercial applications
- CRI: Ra>80

Construction

- Steel body finished in white (RAL 9010)
- Opal diffuser for wide beam distribution
- Opal Polycarbonate TP(a) diffuser
- Integral driver
- Polycarbonate end caps
- Supplied as standard with neutral white (4000K) LED

Installation Notes

Surface mount via rear entry BESA fixings or suspended via 3.0m wire suspension kit

To Specify

TBX Batten 9W - 4000K - Fixed output as per Tamlite TBX range.




IP20 IK06  5 YR

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	9	Rated Input Current (A)	0.05	Driver Current (mA)	250
Weight (kg)	0.55	Power Factor (pf)	0.81	Forward Voltage (V)	20-54
Operating Temperature (ta °C)	0° - 25°	Input Voltage Range (VAC)	220-240	Driver Lifetime (HRS)	100000
Light Output		Inrush Current Peak (A)	8		
Lumens (lm)	1400	Surge Protection (kV)	1		
Efficacy (lm/W)	156	Total Harmonic Distortion (THD)	<15%		
Beam Angle (FWHM°)	122	Output LF Ripple	±7.5%		
Life		Conductor Size (mm)	0.5 - 2.5		
L90 Lifetime (HRS)	20000	Terminal Type	3-pole grip-wire		
L80 Lifetime (HRS)	41000	LED			
L70 Lifetime (HRS)	54000	CCT (K)	4000		
		CRI	80		
		Macadam Ellipses	<3		

Photometrics

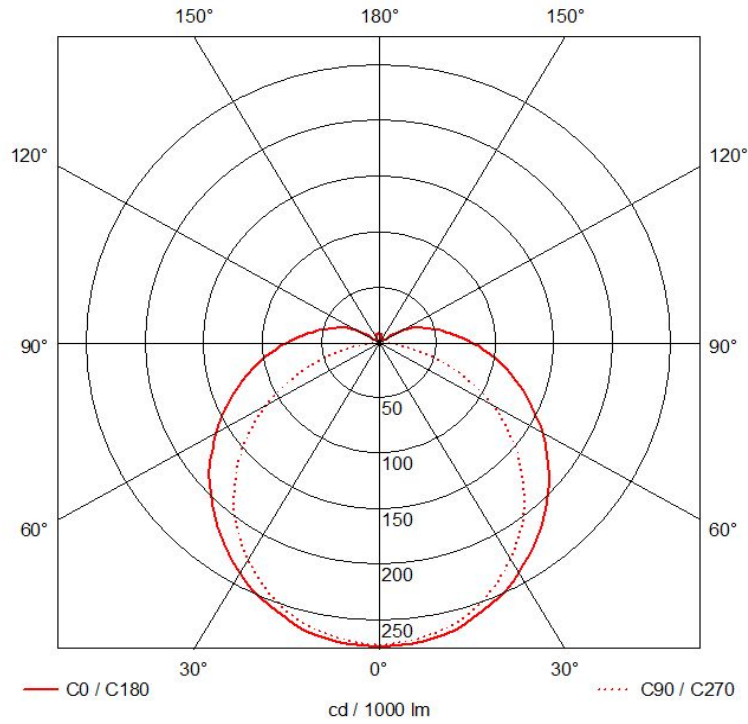

Dimensions

