

Order Code: TBX6470NWM3

TBX Batten 31W - 4000K - Fixed output - Emergency

Features

- Efficacy - 152 lm/W
- Suitable for general use in industrial-warehousing or commercial applications
- CRI: Ra>80

Construction

- Steel body finished in white (RAL 9010)
- Opal diffuser for wide beam distribution
- Opal Polycarbonate TP(a) diffuser
- Integral driver
- Polycarbonate end caps
- Supplied as standard with neutral white (4000K) LED

Installation Notes

Surface mount via rear entry BESA fixings or suspended via 3.0m wire suspension kit

To Specify

TBX Batten 31W - 4000K - Fixed output - Emergency as per Tamlite TBX range.




IP20 IK06  5 YR

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	31	Rated Input Current (A)	0.14	Driver Current (mA)	700
Weight (kg)	1.70	Power Factor (pf)	0.95	Forward Voltage (V)	38-48
Operating Temperature (ta °C)	5° - 25°	Input Voltage Range (VAC)	220-240	Driver Lifetime (HRS)	100000
Light Output		Inrush Current Peak (A)	25	Emergency	
Lumens (lm)	4700	Surge Protection (kV)	1	Emergency Lumen Operating	210
Efficacy (lm/W)	152	Total Harmonic Distortion (THD)	<5%	Emergency Wattage (W)	2
Beam Angle (FWHM°)	122	Output LF Ripple	±5%		
Life		Conductor Size (mm)	0.5 - 2.5		
L90 Lifetime (HRS)	20000	Terminal Type	4-pole + 2-pole grip-wire		
L80 Lifetime (HRS)	41000	LED			
L70 Lifetime (HRS)	54000	CCT (K)	4000		
		CRI	80		
		Macadam Ellipses	<3		

Photometrics

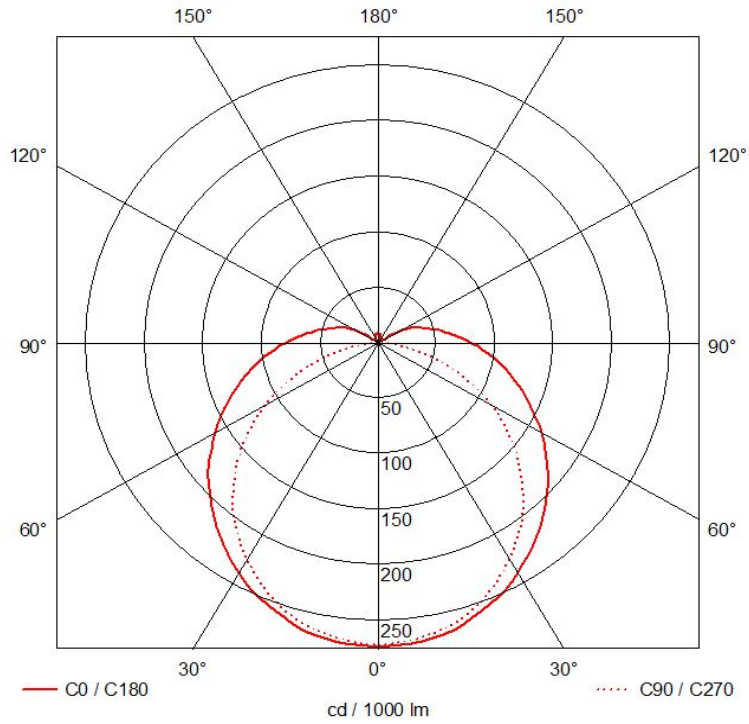

Dimensions

