



Order Code: TDL300NW

i5 Recessed downlight 25W - 4000K - Narrow beam - Fixed output



IP20

IK04

7 YRS

Features

- Gear options including DALI and emergency available

Construction


To Specify

i5 Recessed downlight 25W - 4000K - Narrow beam - Fixed output as per Tamlite i5 range.

Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	25	Rated Input Current (A)	0.11	Driver Current (mA)	700
Weight (kg)	1.49	Power Factor (pf)	0.96	Forward Voltage (V)	33.5
Operating Temperature (°C)	0° to 25°	Input Voltage Range (VAC)	220 to 240		
Light Output		Inrush Current Peak (A)	268		
		Surge Protection (kV)	1		
		Total Harmonic Distortion (THD)	<20%		
		Output LF Ripple	5		
Life		Conductor Size (mm)	0.5 to 2.5		
		Terminal Type	4-pole grip-wire		
		LED			
		CCT (K)	4000K		
L90 Lifetime (HRS)	57000	CRI	80		
L80 Lifetime (HRS)	60000	Macadam Ellipses	<3		
L70 Lifetime (HRS)	60000				

Photometrics

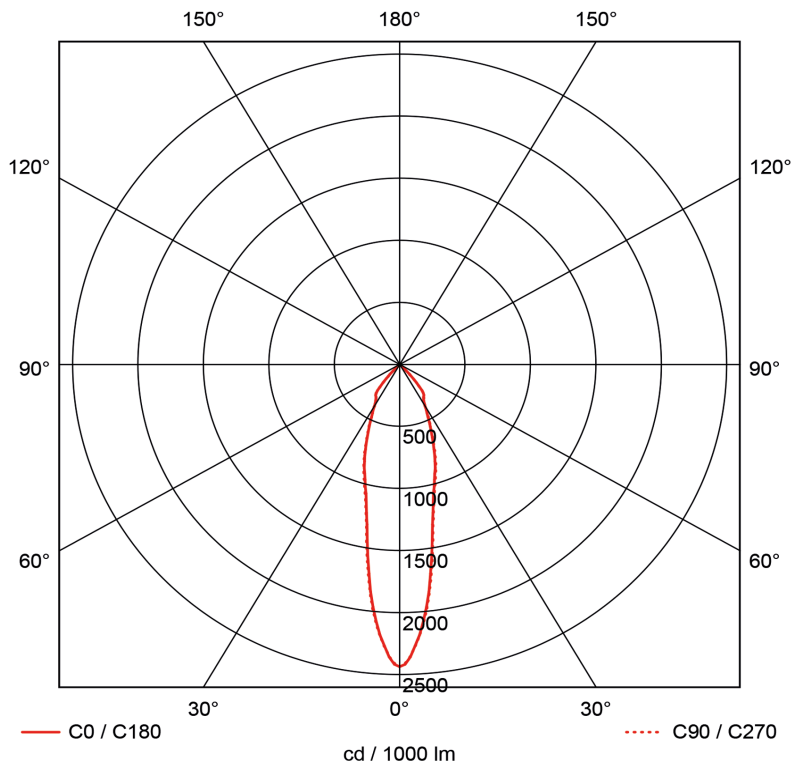

Dimensions

