

Order Code: TMPO5900NW

PRIMA Surface module 60W - 4000K - Fixed output



Features

- Efficacy - 150 lm/W
- Suitable for offices and schools
- CRI: Ra>80

Construction

- Steel body finished in white (RAL 9016)
- Opal diffuser for wide beam distribution
- Polycarbonate extruded diffuser with end caps and screw fixings
- Secured end caps
- Supplied as standard with neutral white (4000K) LED

To Specify


PRIMA Surface module 60W - 4000K - Fixed output as per Tamlite PRIMA range.

IP20 IK04  7 YRS

Technical Data

| General | | Electrical | | Driver | |
|-------------------------------|-------------|---------------------------------|------------------|-----------------------|------------|
| Luminaire Wattage (W) | 60 | Rated Input Current (A) | 0.27 | Driver Current (mA) | 350 |
| Weight (kg) | 4.30 | Power Factor (pf) | 0.97 | Forward Voltage (V) | 153 to 167 |
| Operating Temperature (ta °C) | 0°C to 25°C | Input Voltage Range (VAC) | 220 to 240 | Driver Lifetime (HRS) | 100000 |
| Light Output | | Inrush Current Peak (A) | 30 | | |
| Lumens (lm) | 9000 | Surge Protection (kV) | 1 | | |
| Efficacy (lm/W) | 150 | Total Harmonic Distortion (THD) | <10% | | |
| Beam Angle (FWHM°) | 118 | Output LF Ripple | ±5% | | |
| Life | | Conductor Size (mm) | 0.5 to 2.5 | | |
| L90 Lifetime (HRS) | 58000 | Terminal Type | 3-pole grip-wire | | |
| L80 Lifetime (HRS) | 72000 | LED | | | |
| L70 Lifetime (HRS) | 72000 | CCT (K) | 4000 | | |
| | | CRI | 80 | | |
| | | Macadam Ellipses | <3 | | |

Photometrics

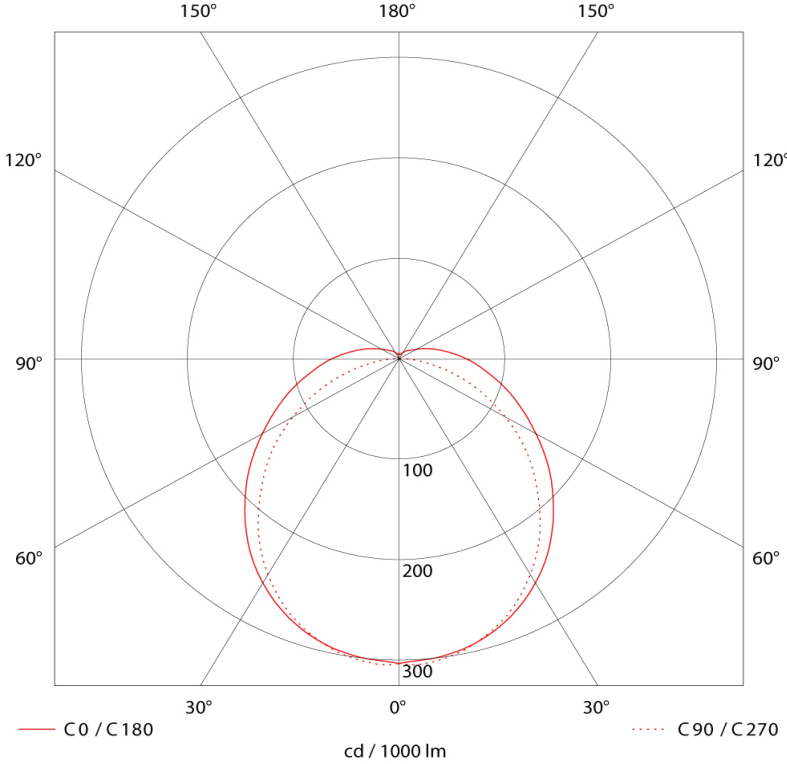

Dimensions

