

**Order Code: TSM66300NW**

TYPHOON Recessed module 25W - 4000K - Fixed output



IP54

IK10



5 YR

### Features

- Efficacy - 120 lm/W
- Suitable for commercial kitchens, changing rooms and other areas where splash protection is required
- Impact resistant construction
- Rated IP54 from underside of ceiling
- Recessed sealed module for areas where a high degree of protection is required
- CRI: Ra>80

### Construction

- Steel body finished in white (RAL 9016)
- Opal Polycarbonate TP(a) diffuser
- Supplied as standard with neutral white (4000K) LED

### Installation Notes

Recessed lay-in for exposed 25mm ceiling grid. Suitable for plasterboard mount. Other sizes available for metal pan ceilings


### To Specify

TYPHOON Recessed module 25W - 4000K - Fixed output as per Tamlite TYPHOON range.

### Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	25	Rated Input Current (A)	0.12	Driver Current (mA)	195
Weight (kg)	5.50	Power Factor (pf)	0.93	Driver Lifetime (HRS)	50000
Operating Temperature (ta °C)	0° - 25°	Input Voltage Range (VAC)	220-240		
<b>Light Output</b>		Inrush Current Peak (A)	17.8		
Lumens (lm)	3000	Surge Protection (kV)	1		
Efficacy (lm/W)	120	Total Harmonic Distortion (THD)	<20%		
Beam Angle (FWHM°)	119	Output LF Ripple	±4%		
<b>Life</b>		Conductor Size (mm)	0.5 - 2.5		
L90 Lifetime (HRS)	66600	Terminal Type	3-pole grip-wire		
L80 Lifetime (HRS)	72000	<b>LED</b>			
L70 Lifetime (HRS)	72000	CCT (K)	4000		
		CRI	80		
		Macadam Ellipses	<3		

### Photometrics

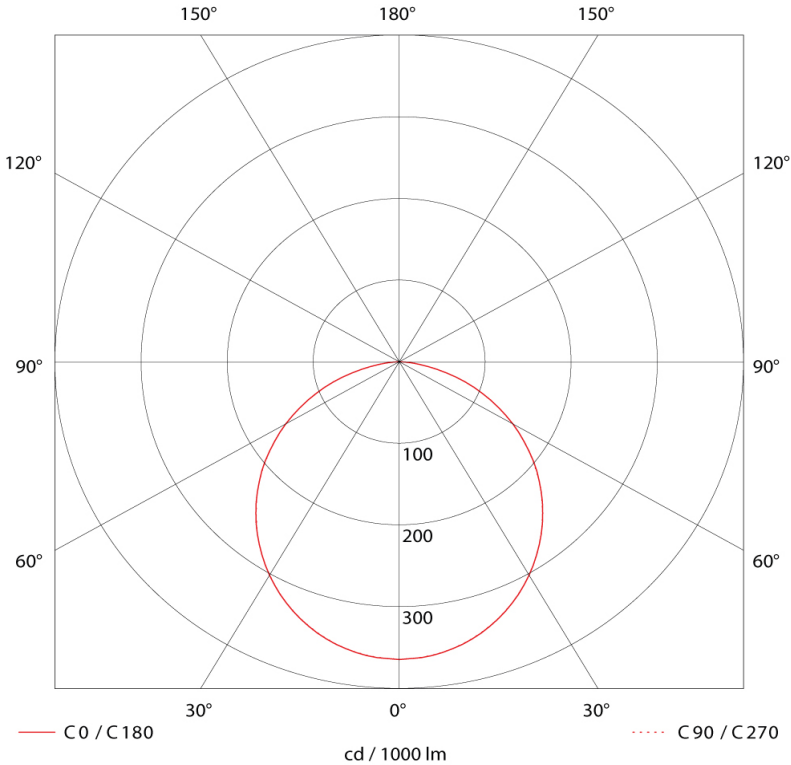

### Dimensions

