

Local distributor code: 381830892  
EAN Code: 3389110527247



## Main

Range	TeSys
Range of product	TeSys D
Product or component type	Contactor
Device short name	LC1D
Contactor application	Motor control Resistive load
Utilisation category	AC-4 AC-3 AC-1 AC-3e
Poles description	3P
[Ue] rated operational voltage	Power circuit: ≤ 1000 V AC 25...400 Hz Power circuit: ≤ 300 V DC
[Ie] rated operational current	200 A (at <60 °C) at ≤ 440 V AC AC-1 for power circuit 150 A (at <60 °C) at ≤ 440 V AC AC-3 for power circuit 150 A (at <60 °C) at ≤ 440 V AC AC-3e for power circuit

## Complementary

Motor power kW	40 kW at 220...230 V AC 50/60 Hz (AC-3) 75 kW at 380...400 V AC 50/60 Hz (AC-3) 80 kW at 415...440 V AC 50/60 Hz (AC-3) 90 kW at 500 V AC 50/60 Hz (AC-3) 100 kW at 660...690 V AC 50/60 Hz (AC-3) 75 kW at 1000 V AC 50/60 Hz (AC-3) 22 kW at 400 V AC 50/60 Hz (AC-4) 40 kW at 220...230 V AC 50/60 Hz (AC-3e) 75 kW at 380...400 V AC 50/60 Hz (AC-3e) 80 kW at 415...440 V AC 50/60 Hz (AC-3e) 90 kW at 500 V AC 50/60 Hz (AC-3e) 100 kW at 660...690 V AC 50/60 Hz (AC-3e) 75 kW at 1000 V AC 50/60 Hz (AC-3e)
Motor power hp	40 Hp at 200/208 V AC 50/60 Hz for 3 phases motors 50 Hp at 230/240 V AC 50/60 Hz for 3 phases motors 100 Hp at 460/480 V AC 50/60 Hz for 3 phases motors 125 Hp at 575/600 V AC 50/60 Hz for 3 phases motors
Pole contact composition	3 NO
Contact compatibility	M13
Protective cover	With
Auxiliary contacts type	Type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1 type mirror contact 1 NC conforming to IEC 60947-4-1

Auxiliary contact composition	1 NO + 1 NC
[Ui] rated insulation voltage	Power circuit: 600 V CSA certified Power circuit: 600 V UL certified Power circuit: 1000 V conforming to IEC 60947-4-1 Signalling circuit: 690 V conforming to IEC 60947-1 Signalling circuit: 600 V CSA certified Signalling circuit: 600 V UL certified
[Uimp] rated impulse withstand voltage	8 KV conforming to IEC 60947
Overvoltage category	III
[Ith] conventional free air thermal current	200 A (at 60 °C) for power circuit
Irms rated making capacity	140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 1660 A at 440 V for power circuit conforming to IEC 60947
Rated breaking capacity	1400 A at 440 V for power circuit conforming to IEC 60947
Associated fuse rating	10 A gG for signalling circuit conforming to IEC 60947-5-1 315 A gG at $\leq 690$ V coordination type 1 for power circuit 250 A gG at $\leq 690$ V coordination type 2 for power circuit
Control circuit type	AC at 50/60 Hz
Coil technology	Built-in bidirectional peak limiting diode suppressor
Control circuit voltage limits	0.3...0.5 U <sub>c</sub> (-40...70 °C):drop-out AC 50/60 Hz 0.8...1.15 U <sub>c</sub> (-40...55 °C):operational AC 50/60 Hz 1...1.15 U <sub>c</sub> (55...70 °C):operational AC 50/60 Hz
Average impedance	0.6 MOhm - Ith 200 A 50 Hz for power circuit
Power dissipation per pole	24 W AC-1 13.5 W AC-3 13.5 W AC-3e
Minimum switching current	5 MA for signalling circuit
Minimum switching voltage	17 V for signalling circuit
Non-overlap time	1.5 Ms on de-energisation between NC and NO contact 1.5 Ms on energisation between NC and NO contact
Maximum operating rate	1200 Cyc/H 60 °C
Inrush power in VA	280...350 VA 60 Hz cos phi 0.9 (at 20 °C) 280...350 VA 50 Hz cos phi 0.9 (at 20 °C)
Hold-in power consumption in VA	2...18 VA 60 Hz cos phi 0.9 (at 20 °C) 2...18 VA 50 Hz cos phi 0.9 (at 20 °C)
Insulation resistance	> 10 MOhm for signalling circuit
Tightening torque	Control circuit: 1.2 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 1.2 N.m - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 12 N.m - on connector hexagonal screw head 4 mm Control circuit: 1.2 N.m - on screw clamp terminals - with screwdriver-pozidriv No 2
Mounting support	Plate Rail
Electrical durability	0.85 Mcycles 150 A AC-3 at U <sub>e</sub> $\leq 440$ V 1 Mcycles 200 A AC-1 at U <sub>e</sub> $\leq 440$ V 0.85 Mcycles 150 A AC-3e at U <sub>e</sub> $\leq 440$ V
Mechanical durability	8 Mcycles
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming-to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming-to EN/ISO 13849-1
Operating altitude	0...3000 m
Compatibility code	LC1D
Product certifications	CCC GOST DNV UL LROS (Lloyds register of shipping) BV GL RINA CSA UKCA CE







## Environment

Climatic withstand	Conforming to IACS E10
Ambient air temperature for storage	-60...80 °C
Fire resistance	850 °C conforming to IEC 60695-2-1
Mechanical robustness	Vibrations contactor open: 2 Gn, 5...300 Hz Vibrations contactor closed: 4 Gn, 5...300 Hz Shocks contactor closed: 15 Gn for 11 ms Shocks contactor open: 6 Gn for 11 ms
Height	158 Mm
Width	120 Mm
Depth	136 Mm
Net weight	2.5 Kg

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2.49 Kg
Package 1 Height	20.0 Cm
Package 1 width	20.0 Cm
Package 1 Length	25.0 Cm
Unit Type of Package 2	P06
Number of Units in Package 2	27
Package 2 Weight	80.23 Kg
Package 2 Height	75.0 Cm
Package 2 width	80.0 Cm
Package 2 Length	60.0 Cm
Package 3 Height	80 Cm


## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	 <a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

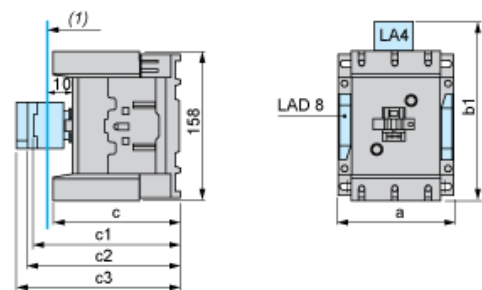

(1) Minimum electrical clearance

LC1		D115 and D150 (3-pole)
a		120
b1	with LA4 DA2	174
	with LA4 DF, DT	185
	with LA4 DM, DL	188
	with LA4 DW	188
c	without cover or add-on blocks	132
	with cover, without add-on blocks	136
c1	with LAD N or C (2 or 4 contacts)	150
c2	with LA6 DK20	155
c3	with LAD T, R, S	168
	with LAD T, R, S and sealing cover	172

## Wiring



Product Life Status : Commercialised