
Data sheet

Light / LEDPRO Lighting

LEDPROPCWH – Dedicated Photocell for LEDPRO Floodlights, White

Product Image & Line Diagram



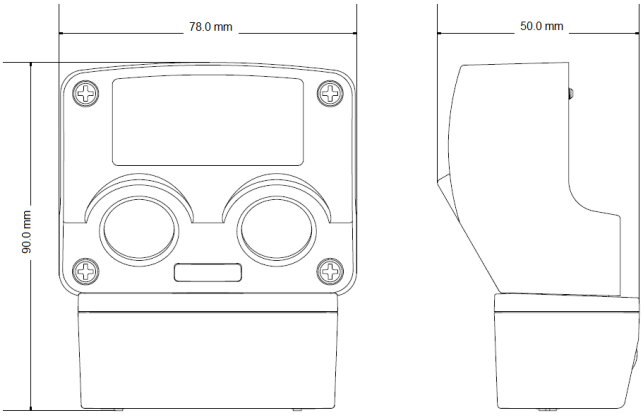

Technical Data

General	
Operating Voltage	230V AC
Frequency	50Hz
Class Protection	Class I
Weatherproof Rating	IP55
Operating Temperature	-20°C to +40°C
Switch Rating	1000W Halogen, 200W Fluorescent tube w/o PF correction & CFL, 140W LED lighting
Accessories (Included)	Instructions, Fittings
Compatible with Timeguard Floodlight Models	LEDPRO10B, LEDPRO10WH, LEDPRO20B, LEDPRO20WH, LEDPRO30B, LEDPRO30WH, LEDPRO50B, LEDPRO50WH, LEDPRO70B, LEDPRO70WH, LEDPRO100B, LEDPRO100WH
Dimensions	Height 90mm, Width 78mm, Depth 50mm
Weight	95g
EAN	5012483013847
Designed In Accordance To	BS EN 60669-2-1 Includes updates & amendments.
Guarantee Period	3 Years
Photocell	
Light ON Time Adjustment	2, 4, 6, 8 hours or Dusk to Dawn
Lux Level Adjustment	Day and night or night time only
Construction;	
Photocell	Polycarbonate

Timeguard Ltd reserves the right to withdraw, improve or modify any design without prior notification. Timeguard Ltd cannot be held responsible for the incorrect application of any product.
Additional information can be found at: www.timeguard.com