
Data sheet

Time / Immersion & General Purpose Time Switches

NTT06 – 24 Hour General Purpose Timeswitch

Product Image & Line Diagram



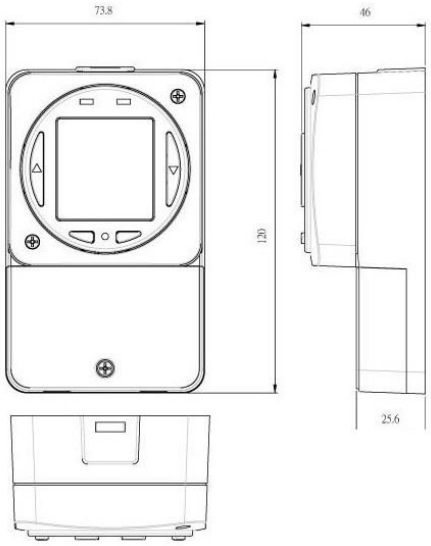

Technical Data

General	
Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Contact Type	Normally open
Class Protection	Class 2
Program	24 Hour daily program (4 ON, 4 OFF)
Number of Channels	1
Power Reserve	Yes, 720 Hours (Non-replaceable rechargeable battery)
Switch Rating	16A Resistive, 4A Inductive. 1 HP. 750W Incandescent/
	Halogen/Fluorescent, 100W LED/CFL lighting.
LED Indicators	Power, Output
Boost Function	Yes, 1 Hour or 2 Hour
Advance Function	Yes, Permanent or until next programmed operation
Operating Temperature	0°C to 40°C
Accessories (Included)	Instructions, Fittings
Accessories (Optional)	None
Dimensions	Height 120mm, Width 74mm, Depth 46mm
Construction	Casing: Polycarbonate
Weight	211g
EAN	5012483012345
Designed In Accordance To	BS EN 60730-2-7 Includes updates and amendments.
Guarantee Period	3 Years

A theben Group Company

Article Number: NTT06 DS230715V1

Timeguard Ltd reserves the right to withdraw, improve or modify any design without prior notification. Timeguard Ltd cannot be held responsible for the incorrect application of any product.
Additional information can be found at: www.timeguard.com