

FLPP1G
FLPP151G
FLPP1GL

Available in:
White, Black, Matt White, Matt Black
and with Brushed Aluminium Covers

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Flat Cat Range of Single Power Points

- Switches approved to AS/NZS3133
- Socket outlets approved to AS/NZS3112
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power Point terminals have 5.8mm bore to suit 4 x 2.5mm² cable
- Fits recessed Australian wall boxes and mounting accessories that use 84mm mounting centres
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White. Also available in Matt White, Black, Matt Black & with Brushed Aluminium Covers - please check availability
- Typical example of size seen below:

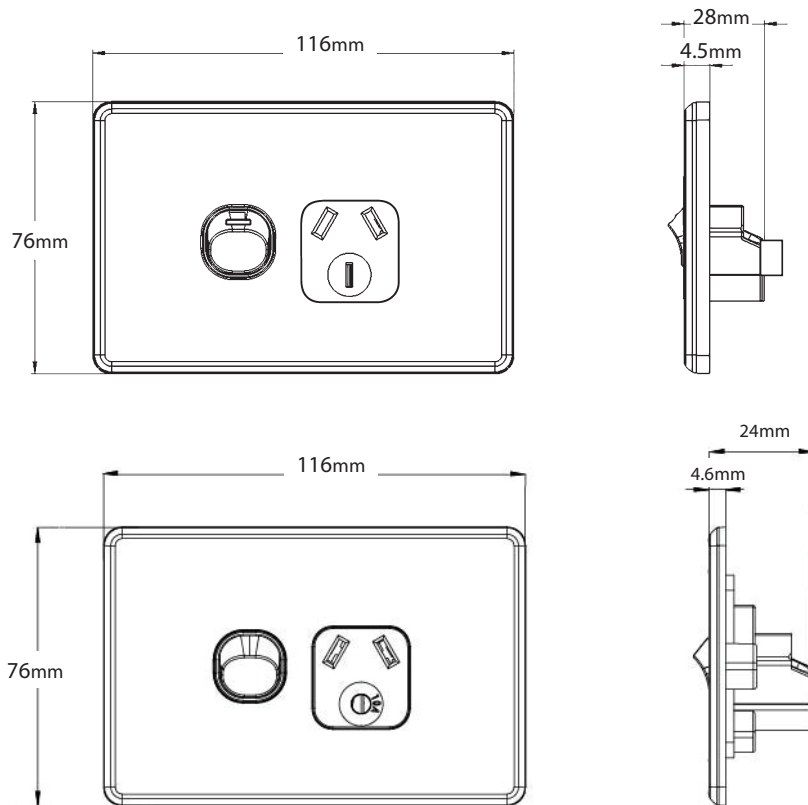

Catalogue Number	Description
FLPP1G	Power Point Switched 1 Gang 10A 250V~
FLPP151G	Power Point Switched 1 Gang 15A 250V~
FLPP1GL	Power Point Switched 1 Gang 10A 250V~ with Round Earth Pin

When ordering **BLACK** product add "**BK**" at end of catalogue number, ie FLPP1GBK

When ordering **MATT BLACK** product add "**MBK**" at end of catalogue number, ie FLPP1GMBK

When ordering **MATT WHITE** product add "**MW**" at end of catalogue number, ie FLPP1GMW

When ordering **BRUSHED ALUMINIUM** (cover) add "**CBA**" at end of catalogue number, ie FLPP1GCBA

Certification Number:

FLPP1G: GMA-509981-EA

FLPP151G: GMA-508175-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gсме.com.au

www.gсме.com.au

