

FLPP2USBAU
FLPP2USBAUBK
FLPP2USBAUMW
FLPP2USBAUMBK

Brush Aluminium Cover to suit
FLPP2USBAUCBA

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Flat Cat Range of Dual USB Charger Power Points

- Wall plate 4.5mm thick to align with other Flat Cat plates in the range.
- Socket rated to 10A 250V a.c.
- Warm white LED indicator to show power on status.
- USB outlet rated to 3.4A max total at 5V.
- Auto switched socket outlet switches active upon plug insertion/withdrawal.
- Each electrical socket contains shutters activated from the neutral pin.
- Product is approved in accordance with AS/NZS3112.
- USB outlets comply with AS/NZS61558.2.16:2010 A1-3.
- The USB circuit is integrated with the socket outlet and connected internally so only one set of terminals are required for the electrician to wire the device.
- Fits other standard mounting accessories where Flat Cat products are used.
- Terminals suit 3 x 2.5mm².
- Where panels are less than 10mm special recessed mounting accessories must be used.
- Fits recessed Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Recommended for phone use only, larger devices such as laptops with USB C connections require much greater output.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is White. Also available in Matt White, Black, Matt Black & with Brushed Aluminium Covers (FLPP2USBAUCBA) - please check availability.
- Typical example of size seen below:

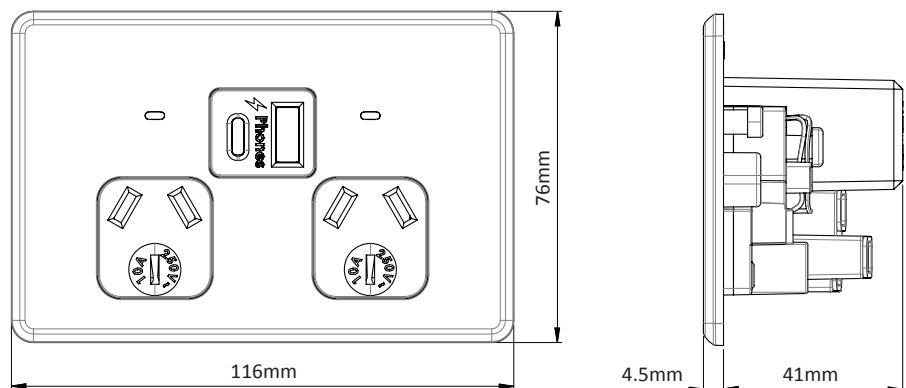

Catalogue Number	Description
FLPP2USBAU	Power Point Fully Integrated Dual USB Charger (Type A & C) Auto Switched, 10A 250V~
FLPP2USBAUBK	Power Point Fully Integrated Dual USB Charger (Type A & C) Auto Switched, 10A 250V~ Black
FLPP2USBAUMW	Power Point Fully Integrated Dual USB Charger (Type A & C) Auto Switched, 10A 250V~ Matt White
FLPP2USBAUMBK	Power Point Fully Integrated Dual USB Charger (Type A & C) Auto Switched, 10A 250V~ Matt Black

Certification Number: GMA-508628-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
 February 2021