





FlexRight installation
in a duct system

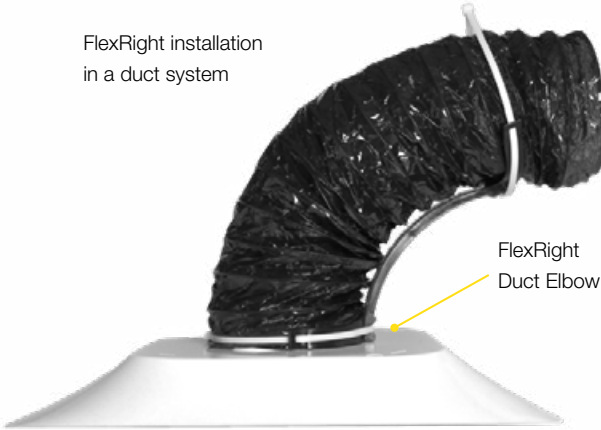

FLEXRIGHT DUCT ELBOW

The FlexRight Duct Elbow is designed to improve the efficiency of a heating and air conditioning system. It does this by removing kinks in ductwork and creating a 90° bend with a large and smoother radius which improves air flow.

- Helps minimise load on ducted heating & cooling units
- Suitable for both new and existing duct installations
- Reduces noise from your system

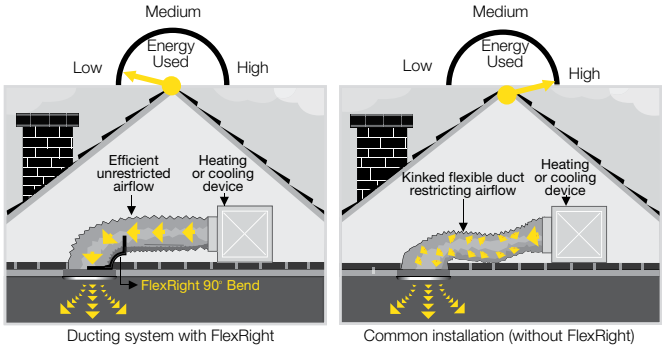

PART NO.	SUIT DUCT DIAMETER, MM
FR-2	100 to 400



Y Piece (YP)

Branch Take Off (BTO)

Y-PIECES AND BRANCH TAKE OFFS

Designed to divide air flow in ducted systems.
Made from injected-moulded ABS flame retardant material.

PART NO.	DUCT DIAMETER, MM (FAN SIDE)	NO. OF DUCT BRANCHES	BRANCH DIAMETERS, MM
YP-100-100-100*	100	2	100
YP-125-125-125*	125	2	125
YP-150-150-150	150	2	150
BTO-150-150-150	150	2	150
YP-200-150-150	200	2	150
BTO-200-200-150	200	2	200 & 150
BTO-200-200-200	200	2	200
YP-250-200-200	250	2	200
YP-250-250-250	250	2	250
YP-300-300-300	300	2	300
YP-300-200-200	300	2	200

* Made from metal



Double Branch Take Off (DBTO)

DOUBLE BRANCH TAKE OFFS

Designed to divide air flow in ducted systems.
Made from injected-moulded ABS flame retardant material.

PART NO.	DUCT DIAMETER, MM (FAN SIDE)	NO. OF DUCT BRANCHES	BRANCH DIAMETERS, MM
DBTO-200-3X150	200	3	150
DBTO-250-3X200	250	3	200
DBTO-300-3X200	300	3	200