

NEW Lo-Carbon Revive 7/SELV

- Designed to exceed the needs of Social Housing
- Continuous running bathroom and kitchen fan
- 7 year warranty
- High performance on trickle to avoid going to boost too often
- Small footprint with optional decoration frame
- Slimmer profile, making it suitable for window installations
- Unique lock settings to prevent tampering
- Humidity, timer and pullcord functions included (HTP)
- Innovative Multi-Vortex technology ensures high performance with improved sound and energy levels
- Intelligent Smart Sense™ data logging technology tells you days run, boost hours run, energy used
- Real-Time IAQ data, gain insights into humidity and fan use



Switchchee Enabled

Revive 7 Switchchee Enabled solution offers continuous, real-time monitoring of indoor air quality, integrating seamlessly with other Switchchee devices to support compliance, tenant wellbeing, and proactive asset management. It provides instant insights into humidity, temperature, and fan usage, enabling early detection of damp, mould, or poor air quality. With direct messaging capabilities and localised temperature tracking, it enhances communication and environmental recommendations – without requiring property access.

Designed for Social Housing

The new and improved Lo-Carbon Revive 7 is a filter-less unitary fan designed to meet the specific needs of social housing. Boasting powerful, quiet, efficient ventilation, Revive 7 provides good indoor air quality and comfort for residents while being quick and easy to install, low maintenance and reliable.

Smart Sense™ Technology

Featuring Smart Sense™ intelligent technology, Revive 7 is quick and easy to install due to its simple alpha numeric LED display which is clear, easy to read and has a three-button menu for commissioning and data gathering. Smart Sense™ technology even tells the LED display which orientation to use depending on whether it is wall or ceiling mounted. All of which saves time on site and reduces installation complications. The Revive 7 is the only fan in the market with a unique lock setting to prevent tampering with the unit, giving the landlords peace of mind.

The display also shows real-time data so landlords can reassure residents of the low-running costs. This includes data such as days run, hours on trickle or boost, and even more specifically, hours run on boost triggered by the humidity sensor. Revive 7 can also tell you how much energy the fan has used.

Multi-Vortex™ Technology

Revive 7 is low maintenance since its market-leading Multi-Vortex™ technology does not require a filter, while the highly sculpted interior actively repels dust, avoiding clogging, helping to avoid call backs. In addition the Multi-Vortex™ technology has a high-pressure hybrid impellor that is powerful and efficient, yet quiet – everything you need for the social housing resident.

Multiple configuration options

Revive 7 can extract up to 60l/s from a kitchen - just two fans can exceed Part F rates for a three bed house. Upon installation you have the choice to change the setting to allow for installation in a bathroom and kitchen. The installer can also choose between ducted or through the wall to ensure the fan performs as intended regardless of install method. All selected via the intuitive LED display.

Intelligent Humidity Sensing and Controls

It is essential to capture moisture at the source before it can migrate throughout the entire property. However, over-ventilating with crude humidity controls can cause excessive noise and discomfort to the resident. The Lo-Carbon Revive 7 range utilises advanced humidity controls which boost in line with the detected humidity levels and whether they are rising or declining. This allows it to effectively deal with moisture, while minimising noise.

Models

Lo-Carbon Revive 7/SELV 7


A universal kitchen or bathroom HTP fan with options to be continuous running or intermittent. Adjustable trickle speed between 6-16l/s and boost speeds of 18, 30 and 60l/s. Day logger and power run meter as standard. 7 year warranty. Built-in lock function. Adjustable dynamic ambient response humidity sensor. Timer adjustable between 1 and 30 minutes. In built boost activated by pullcord, humidity sensor, switched live or remote button. Tile front for discreet installation.

Model	Stock Ref
Lo-Carbon Revive 7	473848A
Lo-Carbon Revive SELV 7	473849A
Lo-Carbon Revive 7 (Switchee Enabled)	416556
Lo-Carbon Revive SELV 7 (Switchee Enabled)	416557


Accessories

Model	Stock Ref
Wall Kit White	254102
Wall Kit Brown	254100
Conversion Kit	408680
Ceiling Kit	407928
Window Kit	407927
Decoration Frame	474041


Dimensions (mm)

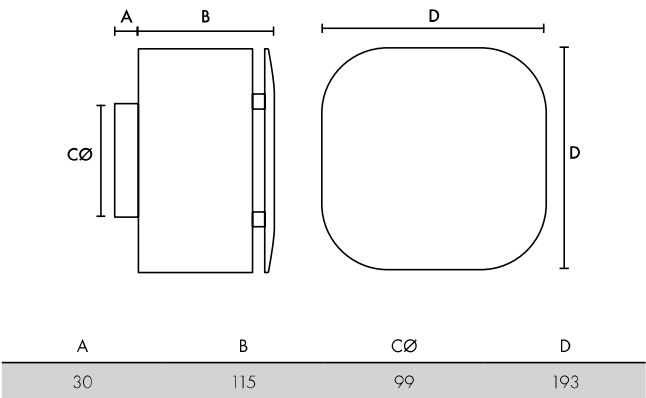

Decoration Frame Dimensions (mm)

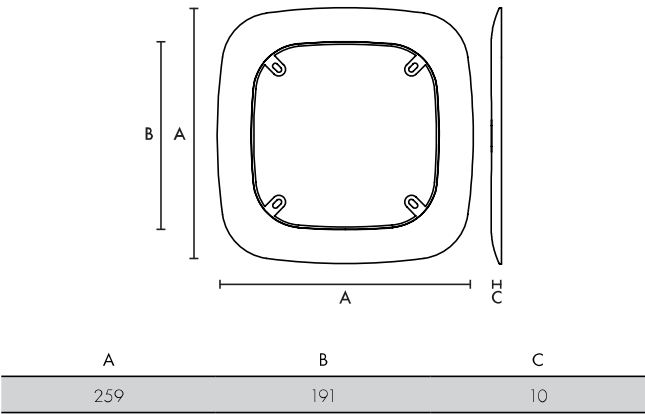

Performance Guide

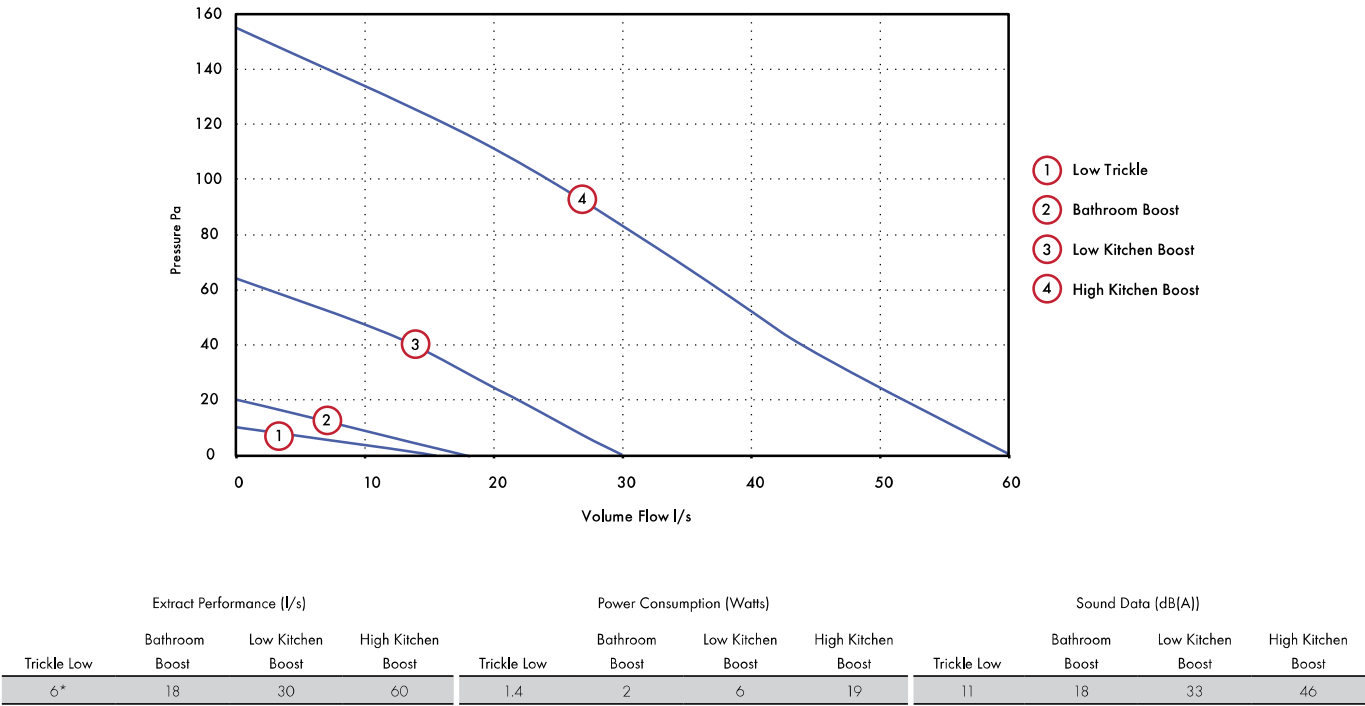

* Can be adjustable between 6 and 16 l/s