


Data sheet | Item number: 770-515

Strain relief housing; 5-pole; for 2 cables; 9.0 ... 13.0 mm; 55 mm; white

www.wago.com/770-515

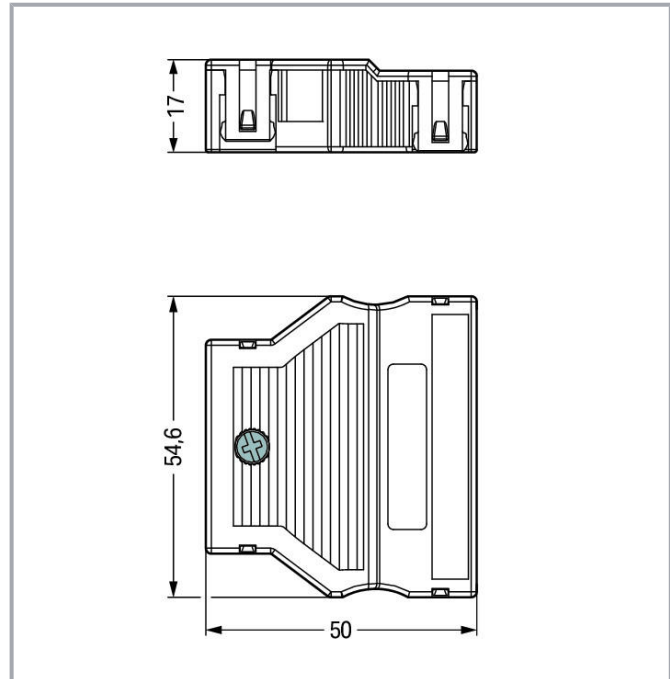

Item description

Strain relief housing *WINSTA*® MIDI 5-pole

Realize your installation project easily and quickly: The strain relief housing from the *WINSTA*® MIDI product line is the product of your choice for error-free electrical installation. You can rely on the level of quality of *WINSTA*® components from WAGO for your electrical installation accessories too. The *WINSTA*® MIDI Pluggable Connection System with Push-in *CAGE CLAMP*® spring pressure connection technology facilitates exemplary electrification. Due to the built-in test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and expense. The strip length is 55 mm.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

WINSTA® MIDI solutions for your electrical installation – maintenance-free

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with WINSTA® MIDI accessories from WAGO.

- simple circuits
- fast, secure installation

Data

Connection data

Connection 1

Pole No.	5
Connectable sheathed cable diameter	9 ... 13 mm
Strip length (outer insulation)	55 mm

Physical data

Width	54.6 mm / 2.15 inch
Height	17 mm / 0.669 inch
Depth	50 mm / 1.969 inch

Material data

Note on material data	Information on material data can be found here
Color	white
Insulation material	Polyamide (PA66)
Fire load	0.358 MJ
Weight	12.5 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C


Subject to changes. Please also observe the further product documentation!

Commercial data


Product Group	20 (WINSTA)
PU (SPU)	25 Stück
Packaging type	box
Country of origin	DE
GTIN	4017332754002
Customs tariff number	39269097900

Approvals / Certificates


Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
	LR Lloyds Register	IEC 61984	02/20050 (E6)

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	cULus Underwriters Laboratories Inc.	UL 1977	E45171

Downloads

Documentation

Bid Text

770-515	2019 Feb 19	xml	Download
---------	-------------	-----	----------

Subject to changes. Please also observe the further product documentation!



X81 - Datei			2.8 kB	
770-515 doc - Datei	2015 Mar 12	doc	24.1 kB	Download
ausschreiben.de 770-515		URL		Download

CAD/CAE-Data

CAE data

EPLAN Data Portal 770-515		URL		Download
WSCAD Universe 770-515		URL		Download
ZUKEN Portal 770-515		URL		Download

CAD data

2D/3D Models 770-515		URL		Download
----------------------	--	-----	--	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-515 Strain relief housing; 5-pole; for 2 cables; 9.0 ... 13.0 mm; 55 mm; white		URL		Download
--	--	-----	--	----------

Installation Notes

Product family

WINSTA® MIDI

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!