


Data sheet

Commercial Art.No.: 5D.S10.9055.0

earth terminal WTN 10 PE

earth terminal WTN 10 PE rated voltage 1000 V, screw connection, number of levels 1, number of clamp positions per level 2, nominal cross section 10 mm², connectable conductor cross section fine stranded without cable end sleeve 0,5mm² - 10mm², mounting method DIN rail (top hat rail), color green/yellow, width/grid dimension 10 mm, inflammability class of insulation material acc. with ul94 V0, terminal blocks for electrical installations yes

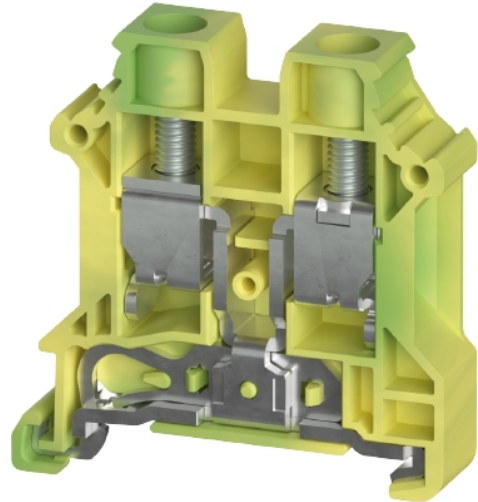

Commercial Art.No.	5D.S10.9055.0
EAN	4049088725425
Order Unit	50

certificates / approvals



LR

Technical data

general

nominal cross section	10 mm ²
color	green/yellow
number of levels	1
number of clamp positions per level	2
width/grid dimension	10 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)
terminal blocks for electrical installations	yes
connection type	screw connection
number of clamp positions per level	2
mounting method	DIN rail (top hat rail)
inflammability class of insulation material acc. with UL94	V0
terminal blocks for electrical installations	yes
halogen free	yes

technical data

rated voltage	1000 V
rated impulse voltage	8 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic

length	47.2 mm
width	10 mm
height	50.2 mm

connection data

connection type	screw connection
connection type 1	screw connection
minimum cross section solid	0.5 mm ²
maximum cross section solid	16 mm ²
minimum cross section fine stranded	0.5 mm ²
maximum cross section fine stranded	10 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.5 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	10 mm ²
wire strip length	12 mm
torque conductor mounting	1.4 Nm

technical data UL/CSA

cross section UL	20-6 AWG
voltage UL	600 V
cross section CSA	20-6 AWG
voltage CSA	600 V

classification

ETIM 9.0	EC000901
----------	----------

product compliance

ROHS conformity status	compliant
REACH-SVHC conformity status	compliant

Accessories



Commercial Art.No.:	Article-type description:	Description:
0D.S10.2055.7	end plate APWTN 10 GN	end plate inflammability class of insulation material acc. with ul94 V0, type of end plate yes, thickness 1.2 mm, length 42.9 mm, color green
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 material plastic, color white, length 230 mm, height 15.1 mm, inflammability class of insulation material acc. with ul94 V0
0D.210.7056.0	marking plate WMP 10-10	marking plate WMP 10-10 modular spacing 10 mm, material plastic, color white, length 128 mm, height 76 mm, mounting method snap-on, inflammability class of insulation material acc. with ul94 V0

A
© Alle Rechte vorbehalten
© All rights reserved
Vertraulichkeitsklasse
Confidentiality Class: Vertraulich
Confidential


B
These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use

C
Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

F

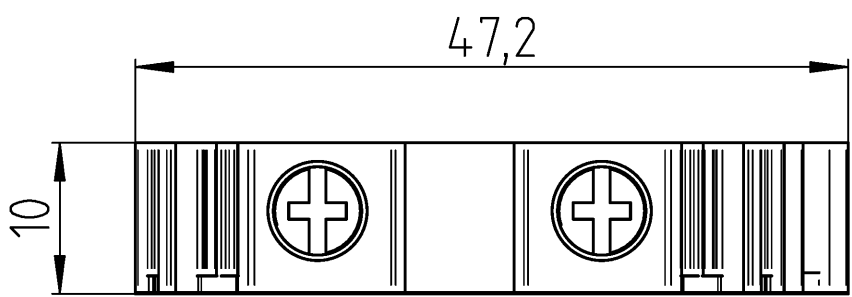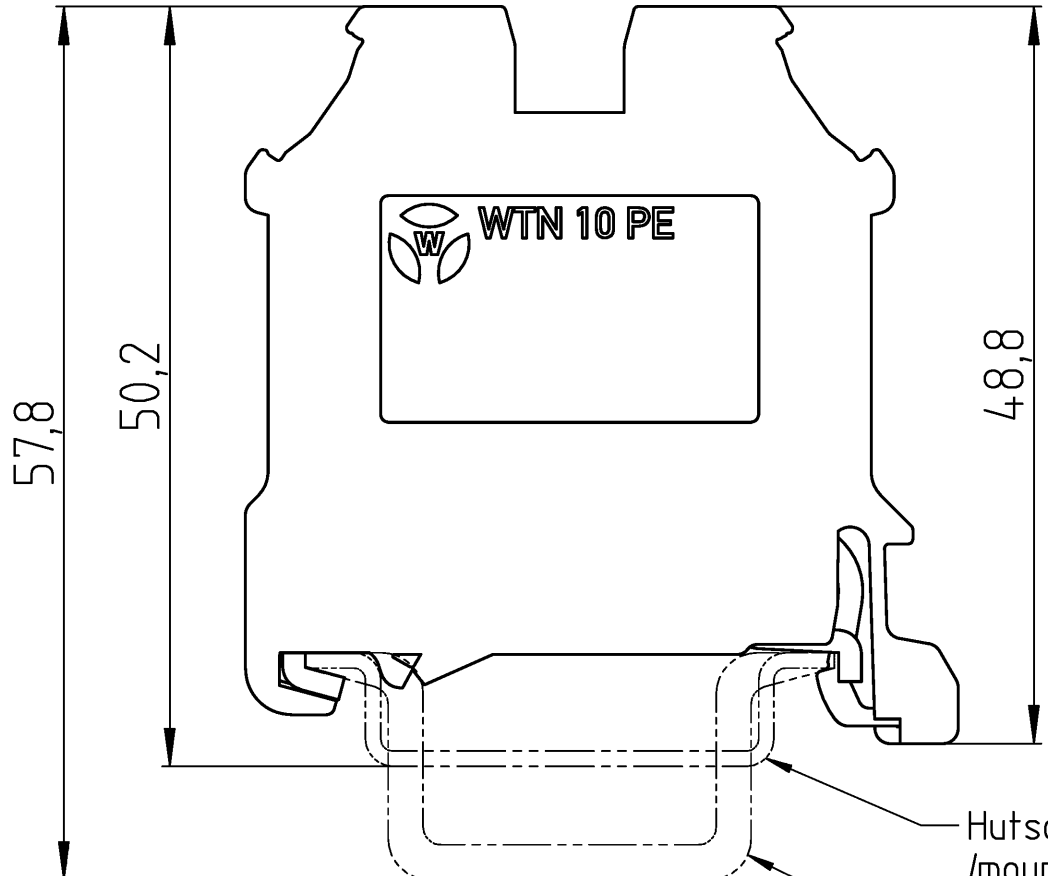

Hutschiene EN 60715-35x7,5
/mounting rail EN 60715-35x7,5
Hutschiene EN 60715-35x15
/mounting rail EN 60715-35x15

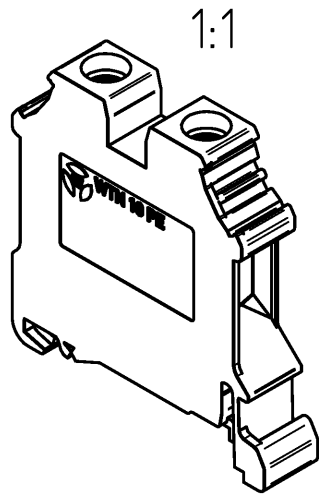

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).					ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!							
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed			1. Verwendung: First Use:		Blatt: 1 von 1 Sheet: 1 of 1				
	/		Werkstoff / Material		Tag/Date	Name		Zeichnung Nr. / Drawing No.	Index			
	/			gezeichnet drawn	10.09.2025	Eichhorn N.						
	/			Maßstab / Scale		Elektronische Freigabe Electronic Release						
	/			2:1								
			Maße in mm / Dimensions are in mm									
	/	Vol.	mm³	Ofl./Srf.	mm²	Ersatz für / Replacement for:						
	/		a	09.04.2026 /	Datum / Blatt Date / Sheet		wieland	Type	Benennung/Title			
Bestell-Nr. / order no.												
5D.S10.9055.0												
Änderung / Revision												
					SCHUTZLEITERKLEMME earth terminal							