


Order Code: XCBHX1
BULKHEAD X1 - 8W-16W - 3000K-6000K + Wattage Switchable - Fixed output

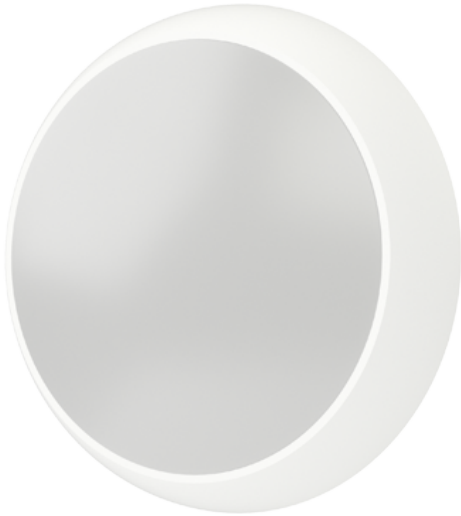

Features

- Suitable for most domestic and commercial applications
- CCT [3000K/4000K/6000K] adjustable via simple 3-way selector switch
- Wattage [8 to 16] adjustable via selector switch
- Ideal for communal spaces and stairwells
- Twist On/Off diffuser with screwlock suitable for public spaces

Construction

- Manufactured from durable thermoplastic materials
- Plug and play emergency and sensor for quick and easy upgrade

Installation Notes

4-point conduit entry for surface mount cable entry

Technical Data

General		Electrical	
Luminaire Wattage (W)	8 to 16	Rated Input Current (A)	0.04 to 0.07
Weight (kg)	0.87	Power Factor (pf)	0.82 to 0.92
Operating Temperature (ta °C)	5° to 25°	Input Voltage Range (VAC)	220 to 240
Light Output		Inrush Current Peak (A)	2.08
Lumens (lm)	1000 - 1900	Surge Protection (kV)	1KV
Efficacy (lm/W)	130	Conductor Size (mm)	0.5 to 2.5
LED		Terminal Type	4 pole piano key
CRI	80		
Macadam Elipses	1.5 to 9.1		
Driver			
Driver Current (mA)	140 to 215 to 280		
Forward Voltage (V)	47.6 to 50		

Order Code: XCBHX1
BULKHEAD X1 - 8W-16W - 3000K-6000K + Wattage Switchable - Fixed output

Dimensions

B (mm)	85
Dia. (mm)	320

Line Drawing

