


Order Code: XCBHX1MS

X1 Bulkhead - CCT [3000K/4000K/6000K] + Wattage Selectable - Microwave sensor

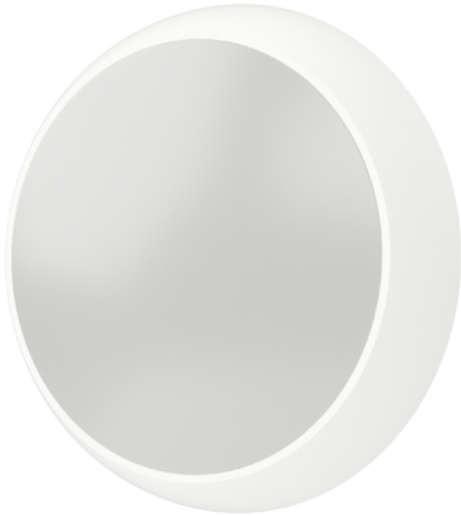

Features

- Suitable for most domestic and commercial applications
CCT adjustable via 3-way selector switch [3000K/4000K/6000K]
Wattage [8W,12W,16W] adjustable via 3-way selector switch
Twist On/Off diffuser with screwlock suitable for public spaces
Hinged gear tray for quick and easy installation

Construction

- Manufactured from durable thermoplastic materials
Modular emergency and microwave sensor's available for quick and easy conversion of a standard fitting
For additional control, please use X1 Bulkhead Remote [Sold Separately]
Pre-assembled emergency and sensor luminaires available

Installation Notes

Conduit side entry points for surface mount cable entry
Loop in/out push-fit terminal block for quick installation

Technical Data

Table with 2 main sections: General and Electrical. General includes Luminaire Wattage, Weight, Operating Temperature, Light Output (Lumens, Efficacy), LED (CCT, CRI, Macadam Elipses), and Driver (Driver Current, Forward Voltage). Electrical includes Rated Input Current, Power Factor, Input Voltage Range, Inrush Current Peak, Surge Protection, Conductor Size, and Terminal Type.

Order Code: XCBHX1MS
X1 Bulkhead - CCT [3000K/4000K/6000K] + Wattage Selectable - Microwave sensor

Dimensions

C (mm)	85
Dia. (mm)	320

Line Drawing

