xcite LED Lighting
Data Sheet

Order Code: XCBLC15CT

15W - Downlight BL CC - CCTK Selector [3000K/4000K/6000K]- Fixed output

Features



3000K 4000K 6000K | IP20 | IK04

Technical Data

General

Luminaire Wattage (W)	15
Weight (kg)	0.26
Operating Temperature (ta °C)	0°C - 25°C

Light Output

Lumens (lm)	1500
Efficacy (lm/W)	100

Electrical

Rated Input Current (A)	0.7
Power Factor (pf)	0.96
Input Voltage Range (VAC)	198-264
Inrush Current Peak (A)	2.1
Surge Protection (kV)	1
Conductor Size (mm)	0.75 - 1.5 mm²
Terminal Type	PUSH BUTTON 2

LED


CCT (K)	TRI-COLOUR
CRI	80
Macadam Elipses	4


Driver

Driver Current (mA)	400
Forward Voltage (V)	32-50

Dimensions

C (mm)	26
Cut Out (mm)	180
Dia. (mm)	200

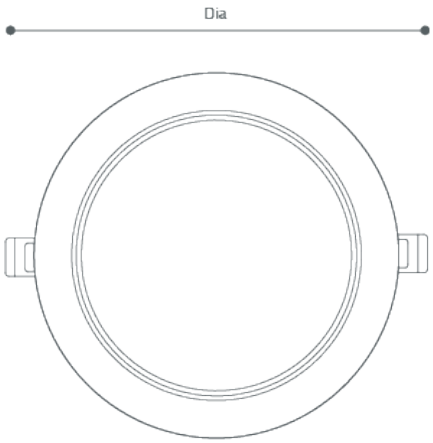

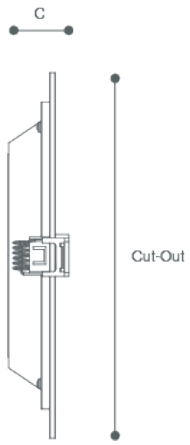

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 06/07/2023 10:08am
Produced by xcite LED Lighting