xcite LED Lighting
Data Sheet

Order Code: XCBLC22CTD

22W - Downlight BL CC - CCTK Selector [3000K/4000K/6000K]- Dimmable



Features

- Suitable for general domestic and commercial use
- Available in 6 sizes
- CCTK [3000K/4000K/6000K] adjustable via simple 3-way selector switch
- Available in 6 different outputs
- Phase cut dimming option available
- 3 hours emergency maintained with compatible conversion box Emergency Kit
- Up to 114 lumens per Watt efficacy

Construction

- Opal polycarbonate diffuser

3000K 4000K 6000K | 30,000 HOURS | 3YR WARRANTY | IP20 | IK04

Technical Data

General

Luminaire Wattage (W)	22
Weight (kg)	0.40
Operating Temperature (ta °C)	0°C - 25°C

Light Output

Lumens (lm)	2500
Efficacy (lm/W)	114

Electrical

Rated Input Current (A)	0.11
Power Factor (pf)	0.96
Input Voltage Range (VAC)	198-264
Inrush Current Peak (A)	2.06
Surge Protection (kV)	1
Conductor Size (mm)	0.75 - 1.5 mm²
Terminal Type	PUSH BUTTON 2

LED

CCT (K)	TRI-COLOUR
CRI	80
Macadam Elipses	4

Driver

Driver Current (mA)	550
Forward Voltage (V)	25-38

Dimensions

C (mm)	26
Cut Out (mm)	280
Dia. (mm)	300

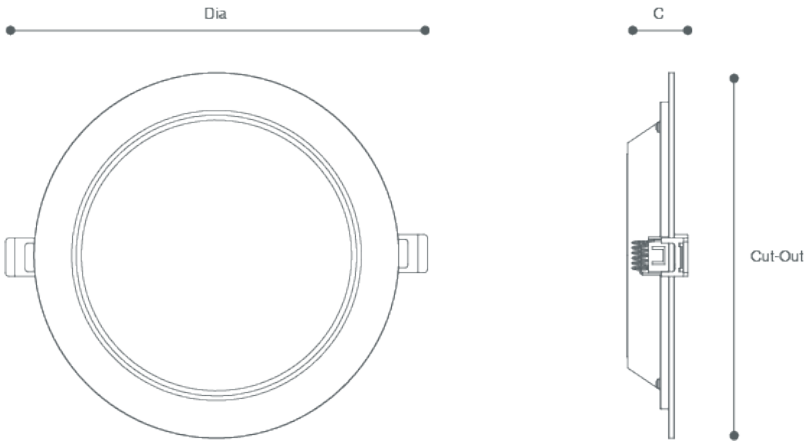

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk