


Order Code: XCCDL3CTSN
CIRCULAR CABINET LIGHT CC XCCDL - Satin Nickel - 3W - 3000K-4000K - Fixed output

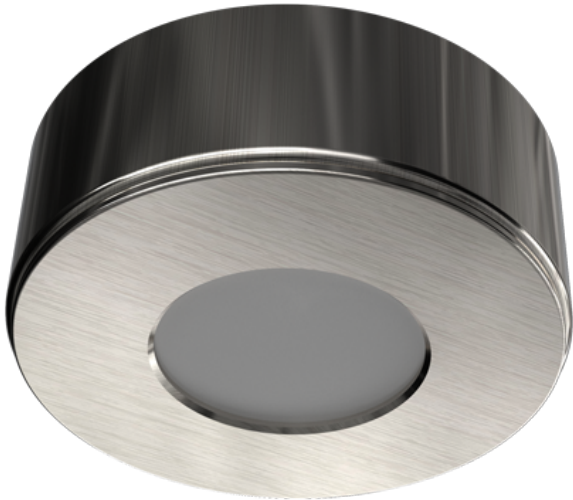

Features

- Suitable for kitchen or wardrobe applications
• LED circular under cabinet downlight
• Can be surface or flush/recessed mounted
• Complete with 1.5m of mains, 2 core cable
• CCT [3000K/4000K] adjustable via simple 2-way selector switch

Construction

- Pressed steel body
• Frosted polycarbonate diffuser
• Integral driver circuitry with mains input

Technical Data

Table with 2 main sections: General and Electrical. General includes Luminaire Wattage (3W), Weight (0.17kg), Operating Temperature (-20 to 50°C), Light Output (240lm, 80lm/W), LED (3000K/4000K, CRI 80, Macadam Ellipses <5), and Driver (120mA, 18V). Electrical includes Rated Input Current (0.03A), Power Factor (0.42), Input Voltage Range (220-240V), Inrush Current Peak (110A), Surge Protection (0.5kV), Conductor Size (0.5mm), and Terminal Type (2 core flex).

Order Code: XCCDL3CTSN
CIRCULAR CABINET LIGHT CC XCCDL - Satin Nickel - 3W - 3000K-4000K - Fixed output

Dimensions

C (mm)	27
Fix	48
Dia. (mm)	73

Line Drawing

