

Order Code: XCDK10DL
10-Way Decking light - 6000K



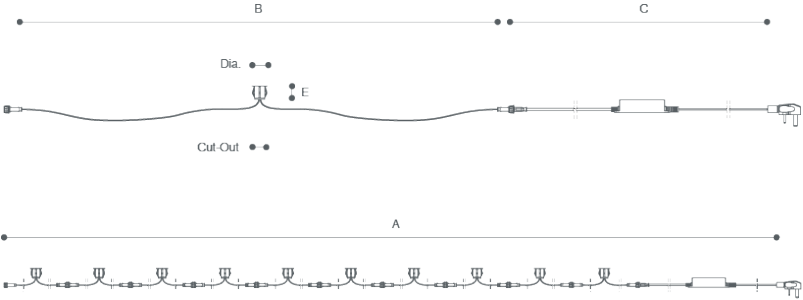


Features

- Suitable for garden decking and walkways
- Available as 5-way or 10-way kit
- Choice of 6000K or adjustable 3000K/4000K option
- Adjustment via twist and locking loom system
- Up to 50 lumens per Watt efficacy

Construction

- Polished stainless steel [304] trim with polycarbonate cover
- Supplied with outdoor IP67 LED Driver

Technical Data

General		Dimensions	
Luminaire Wattage (W)	6	A (mm)	17825
Weight (kg)	0.56	B (mm)	1500
Operating Temperature (ta °C)	0°C - 25°C	C (mm)	2225
Light Output		E (mm)	26
Lumens (lm)	300	Cut Out (mm)	22
Efficacy (lm/W)	50	Dia. (mm)	30
Electrical			
Rated Input Current (A)	0.07		
Power Factor (pf)	0.38		
Input Voltage Range (VAC)	110-240V		
Inrush Current Peak (A)	53.48		
Surge Protection (kV)	2		
LED			
CCT (K)	6000		
CRI	>80		
Macadam Ellipses	5.5		
Driver			
Driver Current (mA)	660mA		
Forward Voltage (V)	12V		