

Order Code: XCLGP6630DL
30W - Recessed Low Glare Panel - 600m x 600m - 6000K



Features

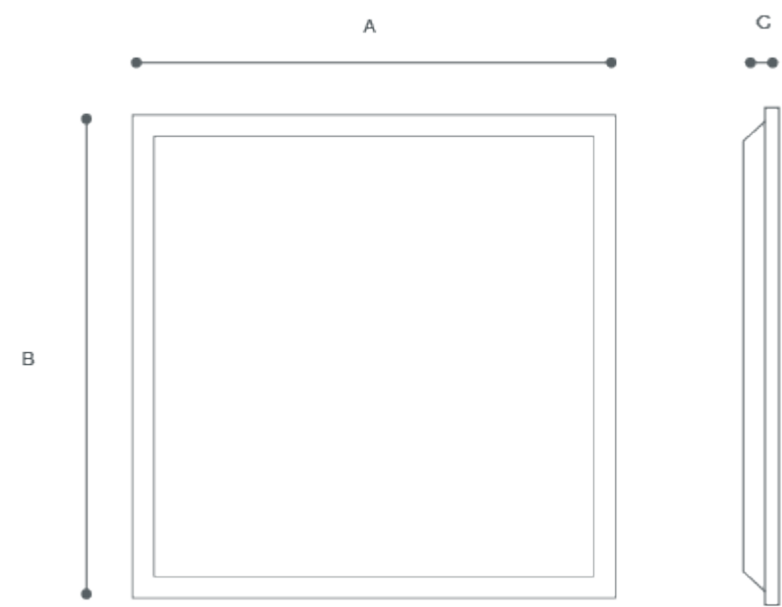
- Backlit recessed module
- More consistent and uniform appearance than traditional edge-lit panels or downlights
- Compatible with Panel Frame and Surface Panel Frame
- 3 hours emergency maintained with compatible conversion box Emergency Kit
- Up to 100 lumens per Watt efficacy

Construction

- Extruded aluminium frame
- Plug and play driver
- Supplied in warm white [3000K], neutral white [4000K], cool white [5000K] or daylight [6000K]



Technical Data

General		Dimensions	
Luminaire Wattage (W)	30	A (mm)	595
Weight (kg)	1.64	B (mm)	595
Operating Temperature (ta °C)	0°C to 25°C	C (mm)	35
Light Output			
Lumens (lm)	3000		
Efficacy (lm/W)	100		
Electrical			
Rated Input Current (A)	0.13		
Power Factor (pf)	0.9		
Input Voltage Range (VAC)	220-240		
Inrush Current Peak (A)	40		
Surge Protection (kV)	1		
Conductor Size (mm)	1.5		
Terminal Type	2 pole grip wire		
LED			
CCT (K)	6000		
CRI	80		
Macadam Ellipses	4		
Driver			
Driver Current (mA)	750		
Forward Voltage (V)	24 to 42		