xcite LED Lighting
Data Sheet

Order Code: XCUCL3NW

3W - Slimline Under Cupboard Cabinet Light - IP20 - 4000K

Features

- Ideal for replacement of linear fluorescent fixtures
- Available in 5 lengths
- Full set of connectors and accessories supplied
- Slimline profile for discreet installation
- Up to 100 lumens per Watt efficacy

Construction

- Extruded plastic body
- LED SMD modules array

4000K IP20 IK06

Technical Data

General

Luminaire Wattage (W)	3
Weight (kg)	0.08

Light Output

Lumens (lm)	300
Efficacy (lm/W)	100

Electrical


Rated Input Current (A)	0.01
Power Factor (pf)	0.4
Input Voltage Range (VAC)	200-240
Inrush Current Peak (A)	9
Surge Protection (kV)	0.5
Conductor Size (mm)	0.75
Terminal Type	Bare wire

LED

CCT (K)	4000
CRI	80
Macadam Elipses	4

Dimensions

A (mm)	222
B (mm)	23
C (mm)	37

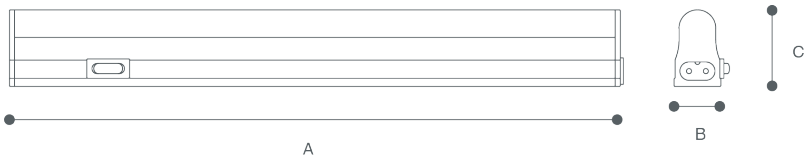

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk