


Contact us at Zano Controls,
 Unit 1 Chantry Court,
 Wrythe Lane,
 Carshalton,
 Surrey,
 SM5 2DG.
 Tel: 0345 519 5858
 Fax: 0845 519 5757
 email: sales@zanocontrols.co.uk



ZSMARTLED DATA SHEET: **GRID**
 MADE IN GREAT BRITAIN

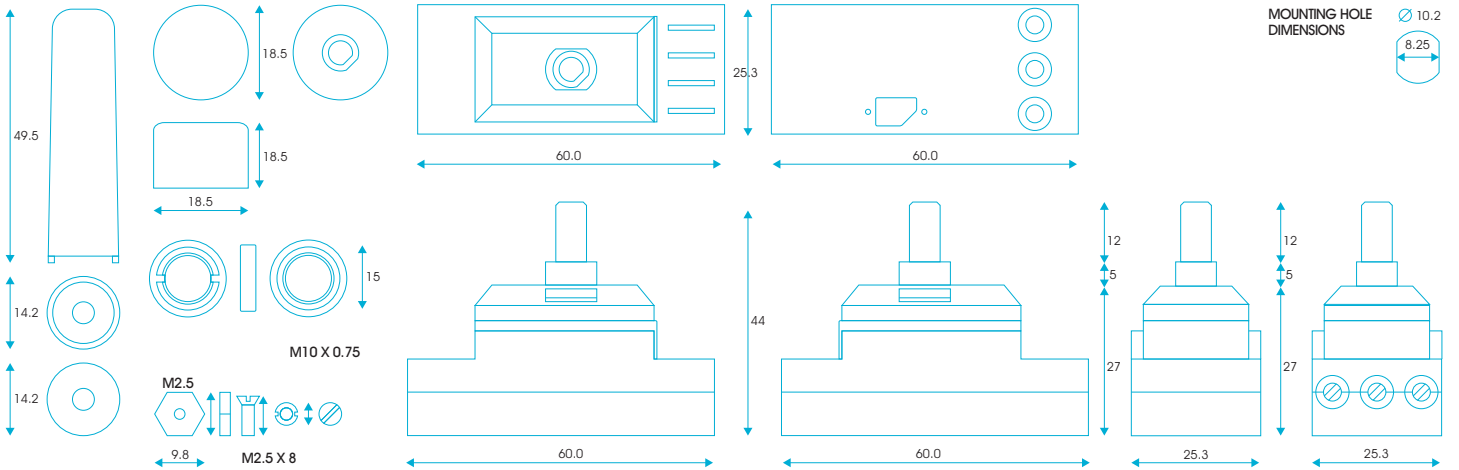

COMPATIBLE LOAD TYPE	LED
2-WAY SWITCH	YES
ON / OFF OPERATION STYLE	PUSH ON / PUSH OFF
DIMMING OPERATION	ROTARY

OVERLOAD PROTECTION	YES
SMART SETTINGS	YES
DB NOISE DURING OPERATION	-110 DBA
SOFT START	YES
SUPPLY VOLTAGE	110V – 240V AC
FREQUENCY RANGE	40 – 50Hz +/-10%
OPERATING TEMPERATURE UNDER FULL LOAD	70°C
RH RANGE	95% NON CONDENSING
MAX AMBIENT TEMPERATURE	40°C
MINIMUM AMBIENT TEMPERATURE	0°C
MAX LOAD	150W/VA
MIN LOAD	5W/VA
TERMINAL TORQUE MAX SETTING	0.4 NM
MAX TERMINAL CAPACITY	3mm
MAX SWITCHING CAPACITY	4A RESISTIVE


1 OR 2 SLAVES CAN BE CONNECTED



Contact us at Zano Controls,
 Unit 1 Chantry Court,
 Wrythe Lane,
 Carshalton,
 Surrey,
 SM5 2DG.
 Tel: 0345 519 5858
 Fax: 0845 519 5757
 email: sales@zanocontrols.co.uk



ZSMARTLED DATA SHEET: SLIMLINE WHITE PLASTIC
 MADE IN GREAT BRITAIN

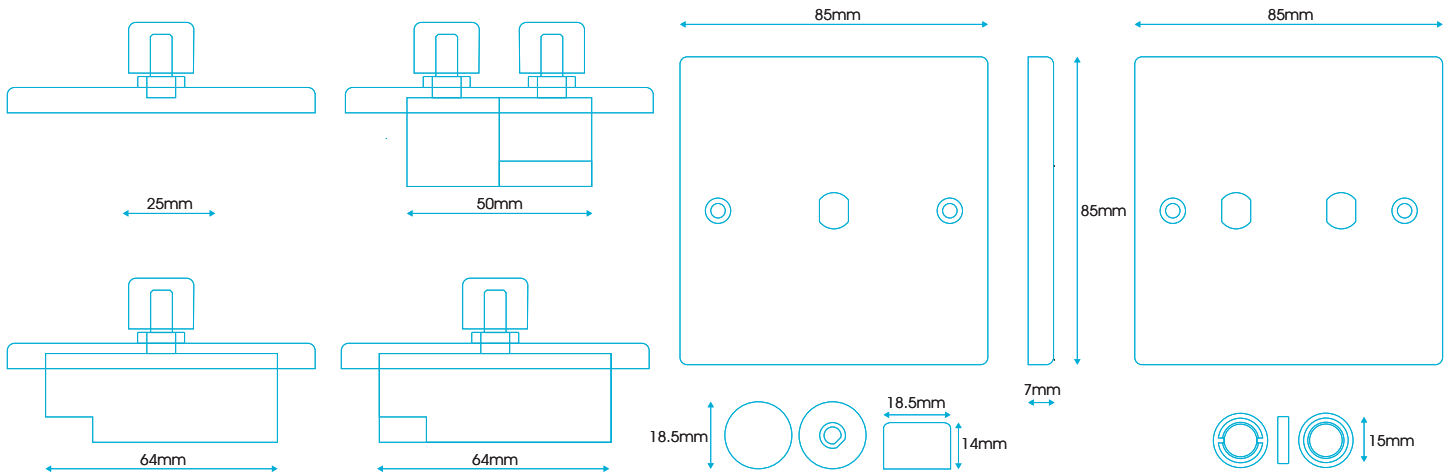

COMPATIBLE LOAD TYPE	LED
2-WAY SWITCH	YES
ON / OFF OPERATION STYLE	PUSH ON / PUSH OFF
DIMMING OPERATION	ROTARY

PLATE MODULES	150W/VA
1 GANG	1 X 150W/VA
2 GANG	2 X 150W/VA

PROTECTION	OVERLOAD/THERMAL
SMART SETTINGS	YES
DB NOISE DURING OPERATION	-110 DBA
SOFT START	YES
SUPPLY VOLTAGE	110V – 240V AC
FREQUENCY RANGE	40 – 50Hz +/- 10%
MAX OPERATING TEMPERATURE	70°C
RH RANGE	95% NON CONDENSING
MAX AMBIENT TEMPERATURE	40°C
MINIMUM AMBIENT TEMPERATURE	0°C
MAX LOAD*	150W/VA
MIN LOAD*	5W/VA
TERMINAL TORQUE MAX SETTING	0.4 NM
MAX TERMINAL CAPACITY	3mm
MAX SWITCHING CAPACITY	4A RESISTIVE

* Per Dimmer

1 OR 2 SLAVES CAN BE CONNECTED

