CHALLENGER
YOUR PARTNER IN A MORE SECURE FUTURE

INSTALLATION INSTRUCTION

AUW3 Wireless Siren Manual

I. Description

Battery operated wireless bell box compatible with the AKWK1 wireless intruder alarm system.

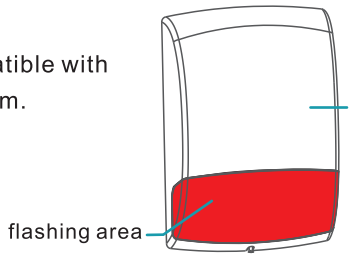

Appearance

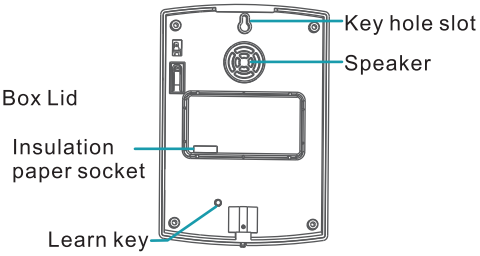

Backplate

II.Technical parameter

Model: AUW3

Alarm Decibel approx 100db

Static current:≤0.8mA

Transmit /Receiving distance up to 50M(OPEN AREA)

Voltage:6V 4 x LR20 (D Cell) Batteries

Alarm current:≤500mA

Transmit /Receiving frequency 868MHz

III.Installation

Method①:



A.Mark drill hole and Drill on the wall.



B. Align the keyhole slot in the backplate over the screw and attach. Use additional fixing to secure the bell box to the wall.

Method②: First unscrew the screw to open the front cover of siren, second drill 4 screw hole on back cover and fix the back cover on the wall.then fix the front cover.

Note:The batteries have already been installed. To activate the bell box please remove the pull out insulating card.

IV.Battery replacement

You need to replace the battery when the siren send low battery signal,please replace the batteries as per the following steps:

1.Release the bottom screw and remove the front cover;
2.Release the screw on battery cover and remove it.
3.Replace 4 LR20（D cell) Batteries and ensure the correct polarity when fitting.
4.Fix battery cover.
5.Fix the front cover of siren.

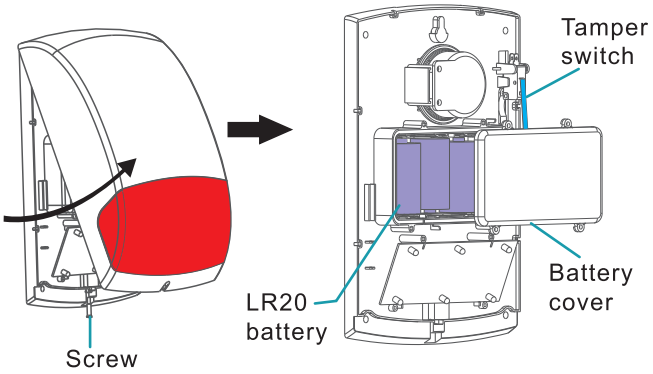

V.Coding

Enroll to panel:Enter into the coding mode of the panel, long press the siren learn key(about 5 seconds),the coding LED is blinking, when you hear the panel prompt coding successfully, then release learn key.It may be more suitable to learn/enrol the bell box at the control panel.

Delete code:Press the siren learn key 3 times(each time 1second),the LED will light on 3 seconds then blink for 10 seconds, and at last keep lighting,that means all codes deleted successfully, release the learn key.

Due to our policy of continuous improvement we reserve the right to change specification without prior notice. Errors and omissions excepted. These instructions have been carefully checked prior to publication. However, no responsibility can be accepted by Challenger for any misinterpretation of these instructions.

CHALLENGER SECURITY PRODUCTS
10 Sandersons Way,
Blackpool, FY4 4NB
Email: enquiries.challenger@adivision.co.uk
Web: www.challenger.co.uk

P/N:20171016A01