

2W Emergency Pack Conversion Kit for LED Flexi-Fit Downlights

Product Ref: **FE3FF**


Technical Features:

- Emergency conversion kit for LED Flexi-Fit downlights from Fusion Luminares
- Manual test button
- 200 - 240V DC output
- Maintained Emergency (3hrs/180mins)



Product Specification

Battery Type	Li-FePo4 26650 6.4V 2000mAh
Cable Entry Ø	0.5-1.5mm ²
Class	Class 1
Colour	White
Compliance	UKCA, CE
Emergency	3 Hours / 180 Mins (Maintained)
Frequency	50/60Hz
Guarantee	2 Years
IP Rating	IP20
LED Indication	Yes
Manual Test Button	Yes
Material	PC
Mounting	Recessed
Operating Temperature	0 - +40°C
Output Load Current (mA)	8.5mA
Suitable for	Fusion Luminaire's LED Flexi-Fit Downlights
Voltage Rating	230V
Wattage	2.0W
Weight	0.443kg
Depth	40mm
Length	213mm
Width	95mm

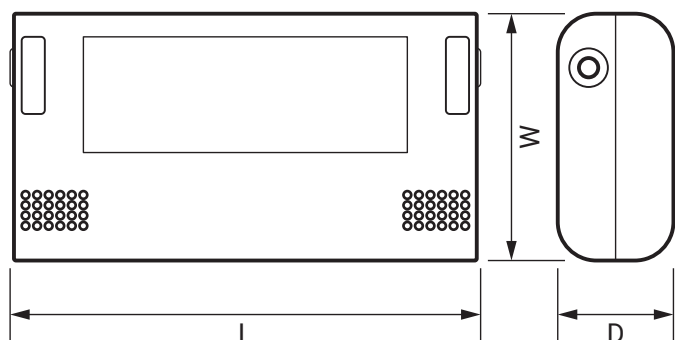

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 769 966 • fusion-luminares.co.uk